
Installation Manual

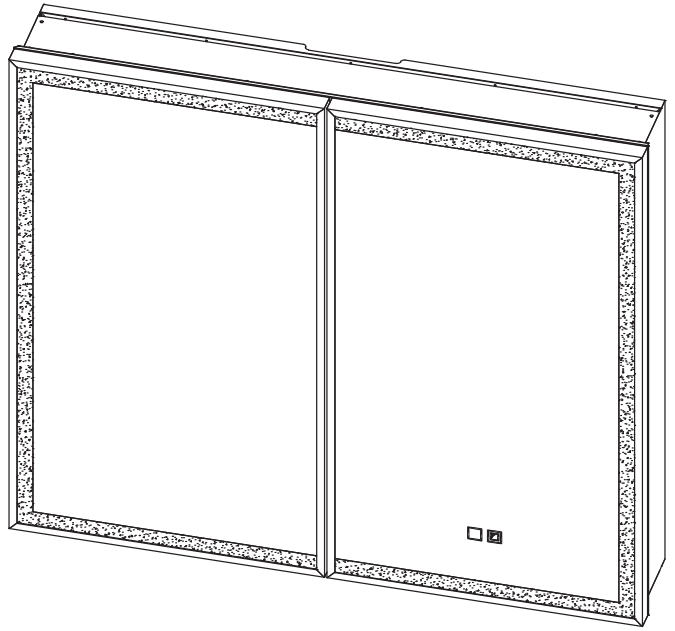

Apply for all electric mirror cabinets with color change triple switch (with defogger ,bluetooth function)

Please keep this page for your online registration. FIFUMCC11V1.0

Content

Important Notes 3

Getting Started 5

Installing Electric Mirror Cabinets 6

Operating instruction 8

Important Notes

Electrical Safety and Standards

- Products are manufactured to class Ⅱ and do not require an earth connection (see Wiring Diagram).
- Mains power supply must be switched off prior to starting electrical installation.
- If there are only two wires coming from your power supply, fitting can be wired to an unearthed circuit.
- All electrical products should be fitted by a qualified electrician in accordance with national wiring regulations (BS61).
- Before drilling, ensure there are no hidden cables or pipes in the wall.
- Products are for in door use only.
- Moisture must not come into contact with the electrical components.
- Products rated ip44 can be installed in bathroom zone 2 only (see Bathroom Zones Diagram).

Compliance

Products in this manual comply with the following safety standards: BS EN 60598-1: 2008+ A11: 2009, EN6059₩-2-1: 1989.

Other Safety Notes


- Work from a suitable platform when operating at heights.
- Wear suitable eye protection when drilling.
- Be careful when using power tools near water.

Wall Types


- Fixings supplied are generally for solid walls.
- For dry stud walls, purchase suitable fixings.
- For advice on suitable wall fixings, contact your local DIY store.
- If fitting on tiles, use a ceramic drill bit and insert wall plugs below the tile.

Please place the product in a well ventilated environment to avoid oxidation caused by long-term humidity.

Wirlng Diagram



Bathroom Zone Diagram

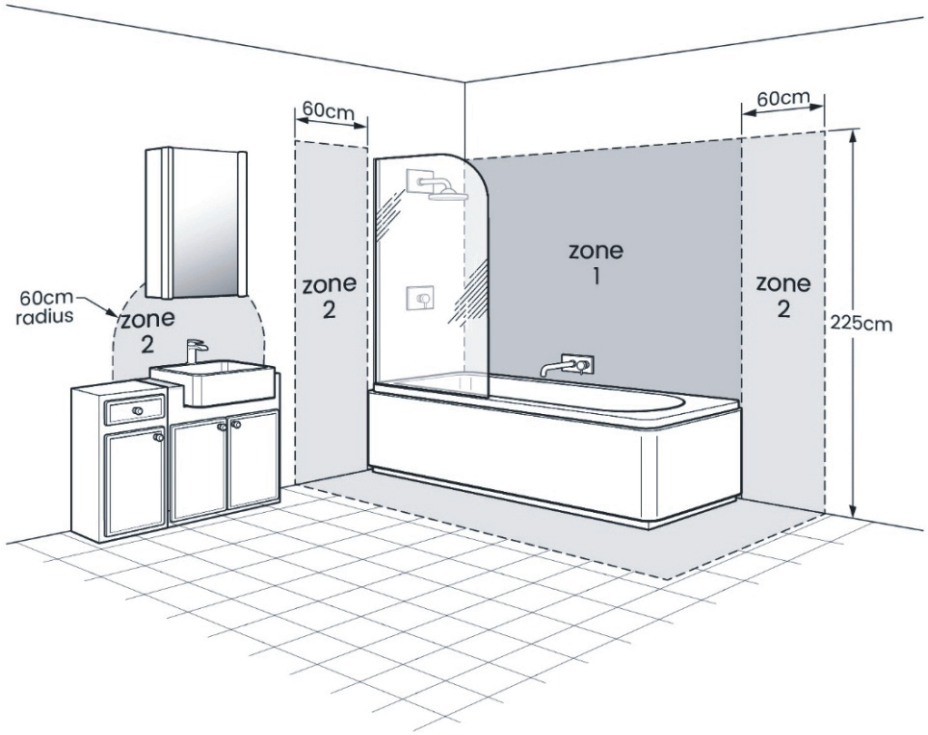

Getting Started

Read the ***Important Notes*** on pages 2 and 3 before starting.

Fixtures Included


Fixtures are provided for certain mirror cabinet types. Examples of fixtures are provided below.

	Recommended max load	Wall types suitable for	
		Brick	Wood
x4 x4 x4 Screw,wall plug and screw cap	70KG	√	√

Other Included Accessorles

Cabinet size	Junction box	Double sided tape	Glass shelf
			
W500xH700	1 pc	1 pc	2 pcs
W600xH700	1 pc	1 pc	2 pcs
W800xH700	1 pc	1 pc	4 pcs
W1000xH700	1 pc	1 pc	4 pcs
W1200xH700	1 pc	1 pc	4 pcs

Tools Required

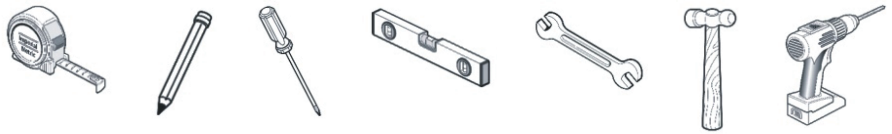


Installing Electric Mirror Cabinets


1 Recommended Wall Opening Dimensions for Each Size.

Cabinet size	X	Y	Z
W500 x H700	490	105	690
W600 x H700	590	105	690
W800 x H700	790	105	690
W1000 x H700	990	105	690
W1200 x H700	1190	105	690


Unit:mm

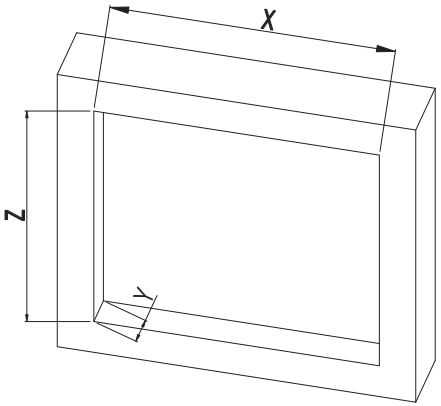


2 Place the cabinet into the opening and mark the fixing hole positions.

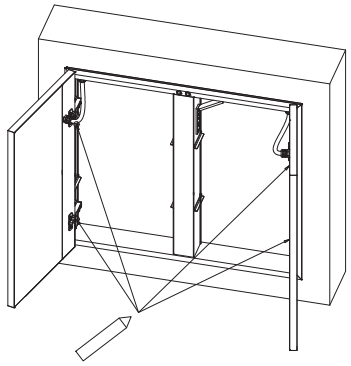


3 Drill the holes at the marked positions and insert the wall plugs.

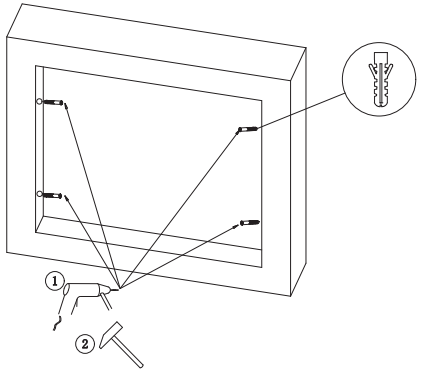


4 Turn off the power.




5 Make the electrical connections.
Use a double-sided tape to secure the junction box to the back of the cabinet.




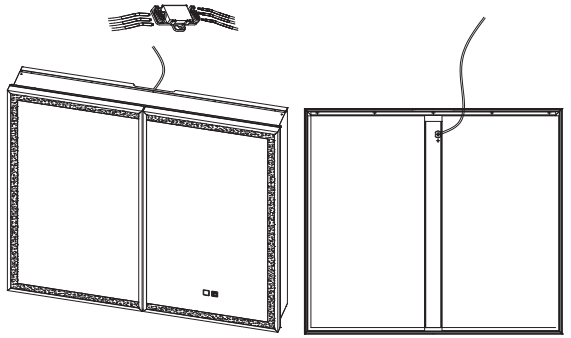

6 Place the cabinet into the opening.

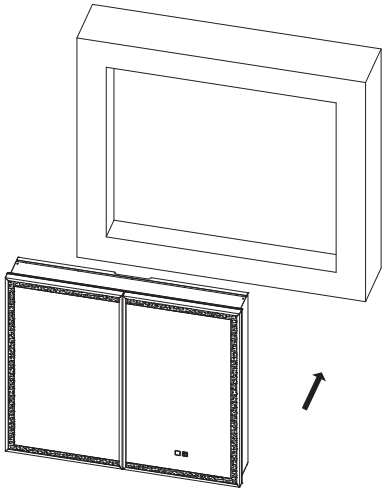


7 Fixing Screws.

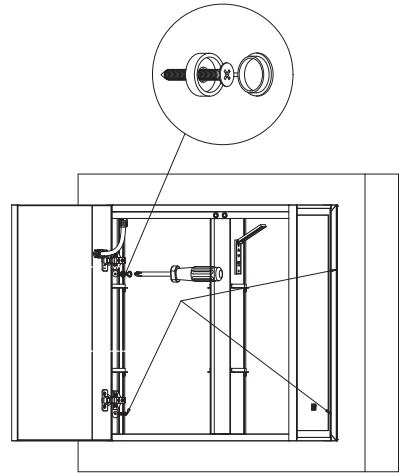


Installing Electric Mirror Cabinets


8 Turn on the power.




9 Adjust and secure the shelf supports.

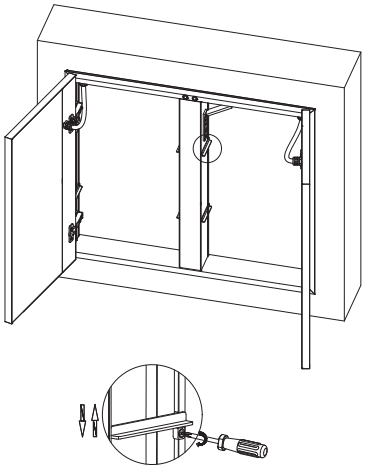

10 Install the shelves.

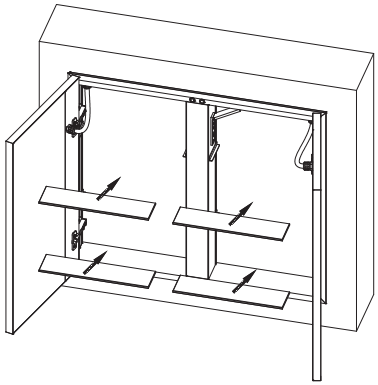


Hinge Adjustment.

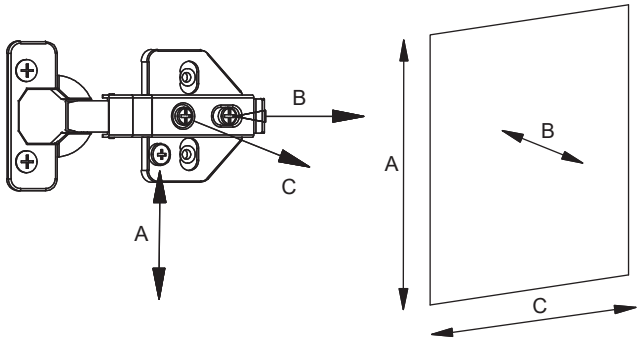


Operating instruction

Infrared Sensor:
Controls the internal cabinet light.
The light turns on when the door is opened and turns off when the door is closed.

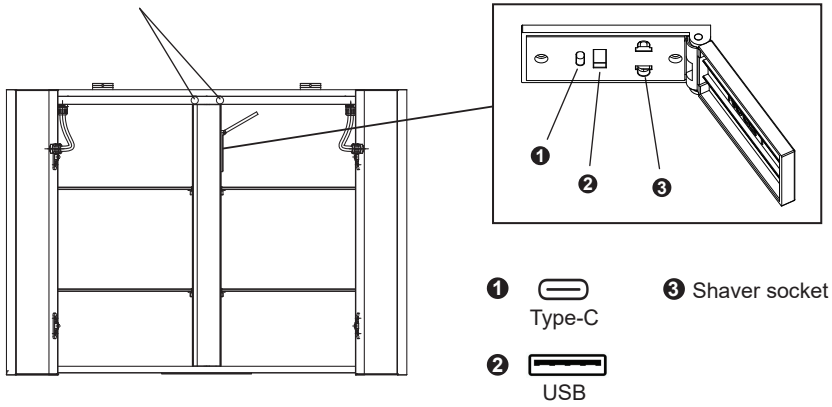

❶ Type-C
❷ USB
❸ Shaver socket

Operating Instruction

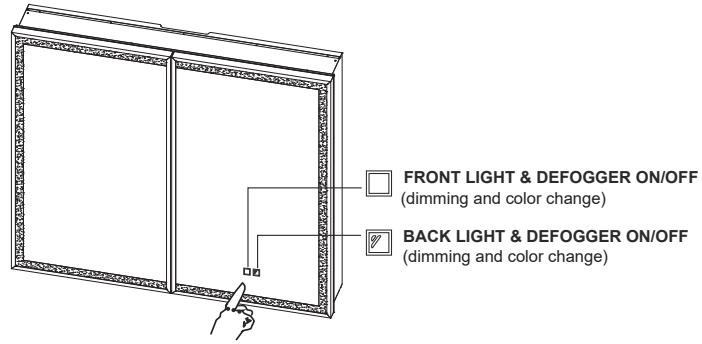


FRONT LIGHT & DEFOGGER ON/OFF,dimming and color change

● Light & Defogger ON / OFF

Short press (<1s)to turn the LED Light & Defogger ON/OFF.

Short press(<1s) Short press(<1s)

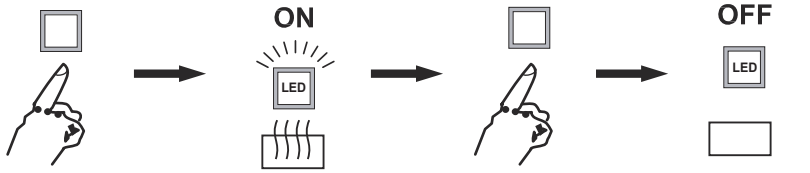


(defogger on) (defogger off)

● Color Temperature Change

When the light is ON, double-tap within 3 seconds to switch color temperatures (3000K / 4000K / 6500K).

Short press(<1s)

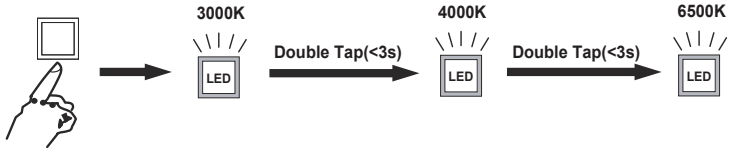


● Brightness Adjustment (Dimmer)


Long press (>1s) and hold the ON/OFF switch to activate dimming mode.

The brightness can be adjusted from 5%-100%.

Long press (>1s) and hold on

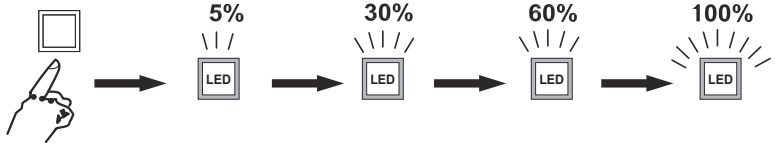

● In Standy Mode - Hold the touch sensor to turn off the On/Off illuminated circle.

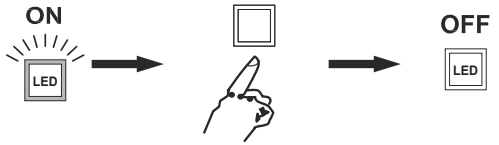


BACK LIGHT & DEFOGGER ON/OFF,dimming and color change

● Light & Defogger ON / OFF

Short press (<1s)to turn the LED Light & Defogger ON/OFF.

Short press(<1s) Short press(<1s)

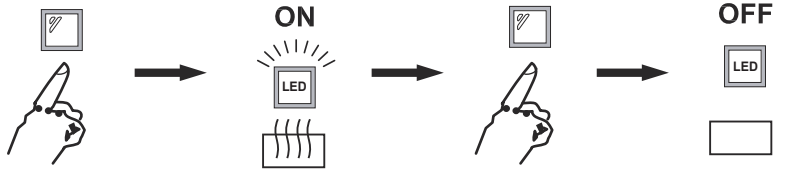


(defogger on) (defogger off)

● Color Temperature Change

When the light is ON, double-tap within 3 seconds to switch color temperatures (3000K / 4000K / 6500K).

Short press(<1s)

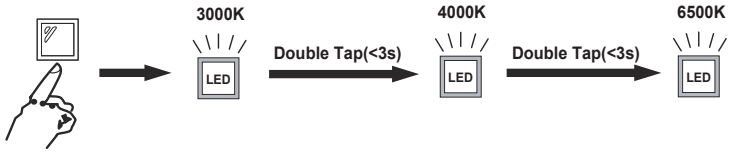


● Brightness Adjustment (Dimmer)

Long press (>1s) and hold the ON/OFF switch to activate dimming mode.

The brightness can be adjusted from 5%-100%.

Long press (>1s) and hold on

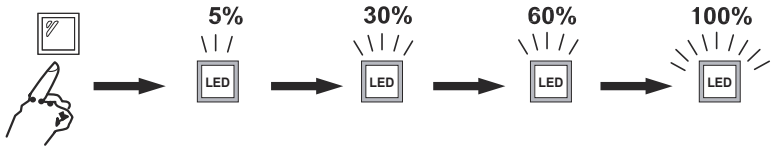

Important Notes:

1.Memory function:the switch is with Memory function,it will keep last setting of the brightness level, color temperature,and ON/OFF status.

2.Anti-fog function： The defogger is activated when either light is turned ON. The defogger function automatically turns off after 1 hour and the timer resets with each new light activation.