


Installation Manual

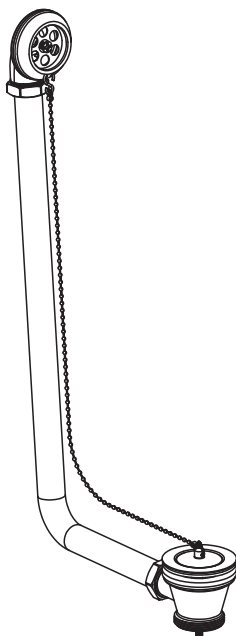

Apply for following models
55237/55238/55239

Please keep this page for your online registration.

No. **FIACBHI4V1.0**

Product image for reference




We highly recommend that this product is installed by a qualified professional. Installation must comply with any water regulations or any particular regulations as specified by your local water company.

Overflow pipe assembly

1. Identify all components are present prior to installation.
2. Remove screw (2) from flange (3), then remove the flange from the waste body (6).
3. Secure the waste body (6) against the underneath of the bath with the sealing washer (5) in position.
Use the flange (3) with the washer (4) between the flange & the bath, securing the assembly with screw (2).
4. It is recommended that silicon sealant be applied to all sealing faces of the washer (4).
5. Tighten screw (2). Do Not over tighten.
6. Use the conical washer (7) & nut (8), in the order shown, to hold the tube (9) into the waste body (6).
7. Use the same process to assemble the overflow elbow (10) to the tube (9).
8. Secure the overflow elbow (10) to the bath using the sealing washer (11) & the overflow washer (12), positioned either side of the bath surface. Then place the overflow (13) on top of the overflow washer (12) & secure the assembly using screws (14).
9. It is recommended that silicon sealant be applied to both sealing faces of washer (12).
10. Tighten screw (14). (DO NOT OVER TIGHTEN)
11. The overflow pipe can be cut to size if needed.
12. Check all joints & connections for leaks.

Parts List

1. Plug
2. Screw
3. Flange
4. Washer
5. Sealing washer
6. Waste body
7. Conical washer
8. Nut
9. Tube
10. Overflow elbow
11. Overflow seal washer
12. Washer
13. Overflow
14. Fixing screw (M6x25mm)
15. Spare screw (M6x50mm)

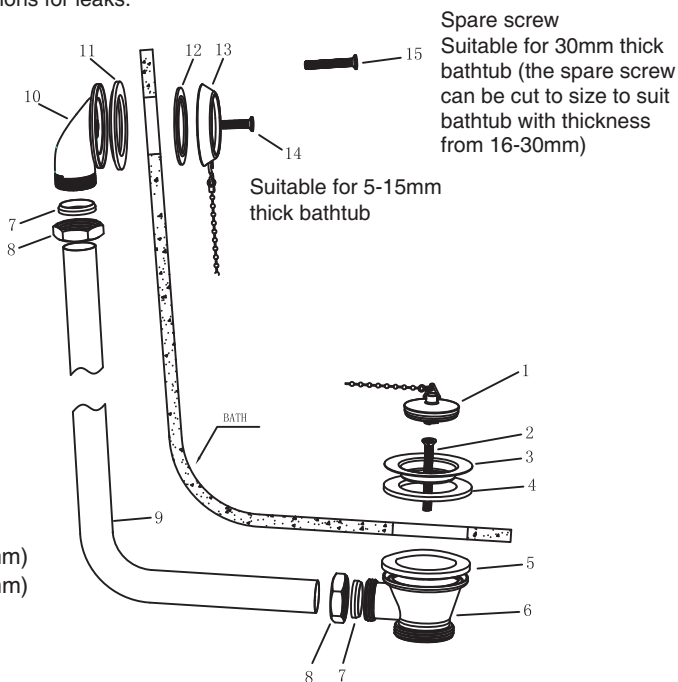

Aftercare:

The end user is required to regularly maintain and clean product using warm soapy water and a soft cloth for the product warranty to be valid.

Surfaces should be maintained using a clean damp cloth, no corrosive and abrasive agents or materials should be used or come into contact with the surface finish, as this will invalidate your product warranty.