


Installation Manual

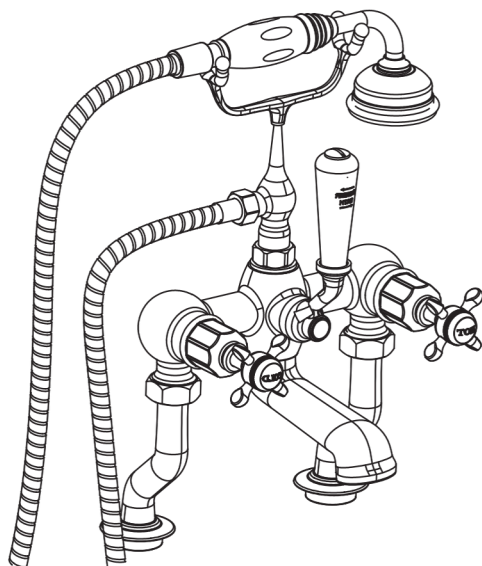

Apply for following models
12244/12245

Please keep this page for your online registration.

No. FIBTTBH32V1.0

Product image for reference




WARNING



CAUTION

If using solder for the installation of the tap; the tap seats, cartridges and washers will have to be removed before heating. Otherwise, the warranty will be voided on these parts.

TOOLS YOU MIGHT NEED



Screwdriver



Adjustable
Wrench

TECHNICAL DATA

Recommended water pressure: 7.25 - 43.5 psi


Max. Water pressure: 116 psi

Recommended hot water temp: 99.14 - 135.32 °F

Max. Hot water temp: 164.84 °F

Please know and follow all applicable local plumbing codes when setting the temperature on the water heater.

PARTS LIST

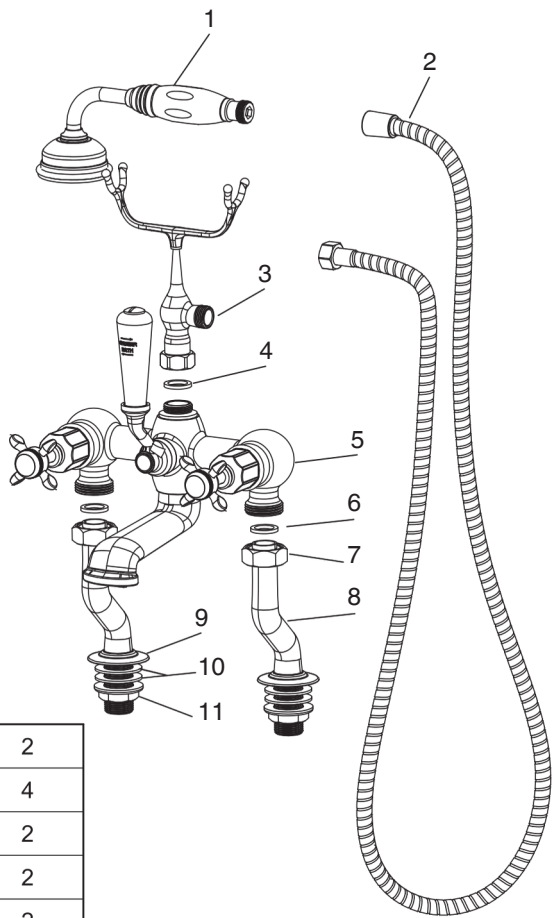



11	Plastic Hex Nut	2
10	Flat Washer	4
9	Flange	2
8	Offset Connector	2
7	G1" Hex Nut	2
6	Rubber Washer	2
5	Tap Body	1
4	Rubber Washer	1
3	Handset Holder	1
2	Hose	1
1	Handset	1
No.	Description	Quantity

BEFORE INSTALLATION

- ⌘ Observe all local plumbing codes.
- ⌘ Make sure water supply is turned off.
- ⌘ Read these instructions carefully to ensure proper installation.
- ⌘ Cover your drain to avoid losing parts.
- ⌘ Check to make sure you have the following parts indicated below.




Please check you have all of these items in the box.

 Tap Body X1	 Handset X1	 Handset Holder X1	 Offset Connector X2
 Hose X1	 G1" Hex Nut X2	 Rubber Washer X2	
 Flange X2	 Plastic Hex Nut X2	 Flat Washer X4	

INSTALLATION PROCEDURE


1

Remove the flat washers (10) and plastic hex nuts (11) from the offset connectors (8).

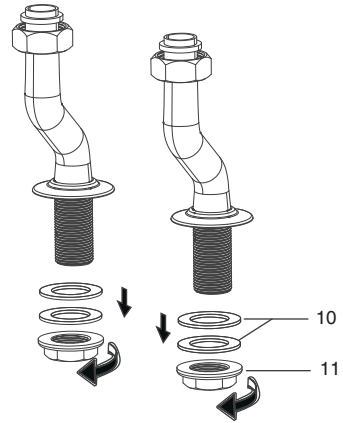

2


Install the rubber washers (6) and offset connectors (8) into the tap body (5), then slightly tighten the hex nut (7).

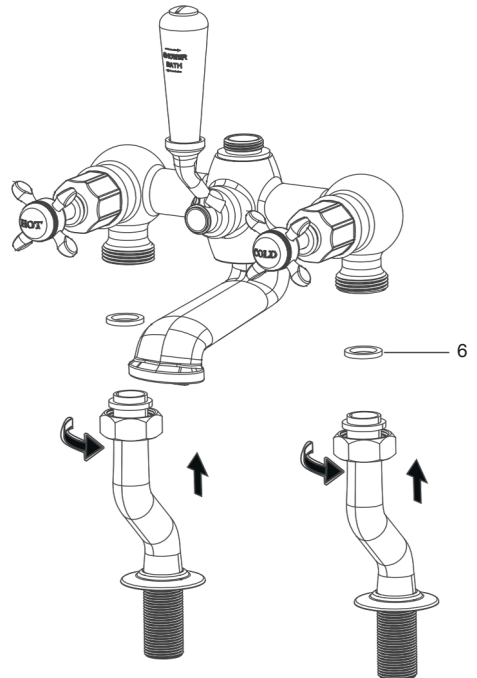

INSTALLATION PROCEDURE


3

Install the flat washers (10) onto the offset connectors (8). Insert the assembled left and right offset connectors into the two mounting holes in the bathtub. Then install the flat washers (10) and plastic hex nuts (11), and tighten the nuts to secure the tap body (5).

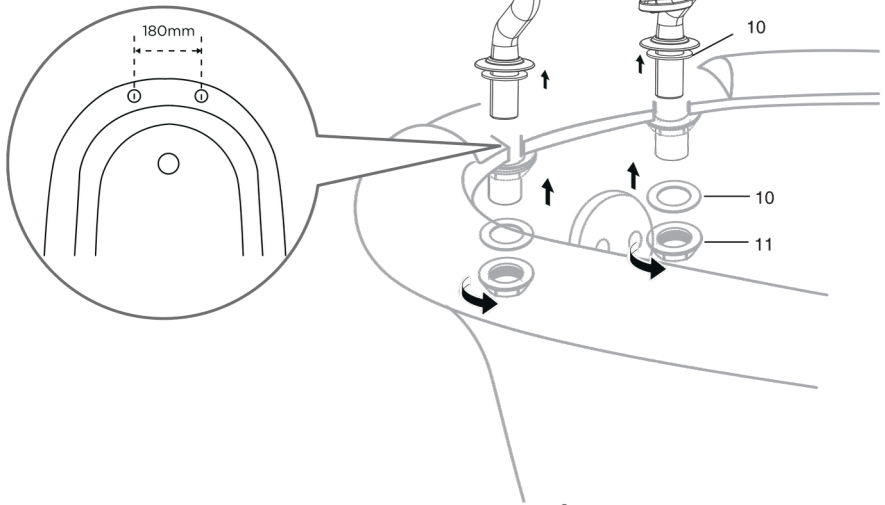

4


Install the rubber washer (4) onto the handset holder (3). Then install the handset holder onto the tap body (5). Tighten the hex nut. Adjust the handset holder to be parallel to the tap body (5).

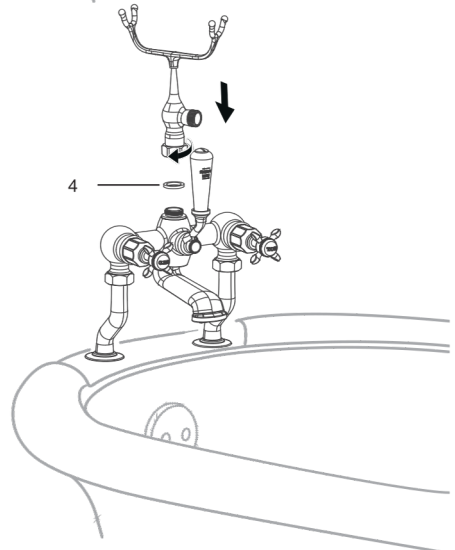


INSTALLATION PROCEDURE

3

Connect the hex nut end of the hose (2) to the handset holder, and connect the other end to the shower handset. After installation, place the shower handset on the handset holder. (Note: There are washers on both ends of the hose.)

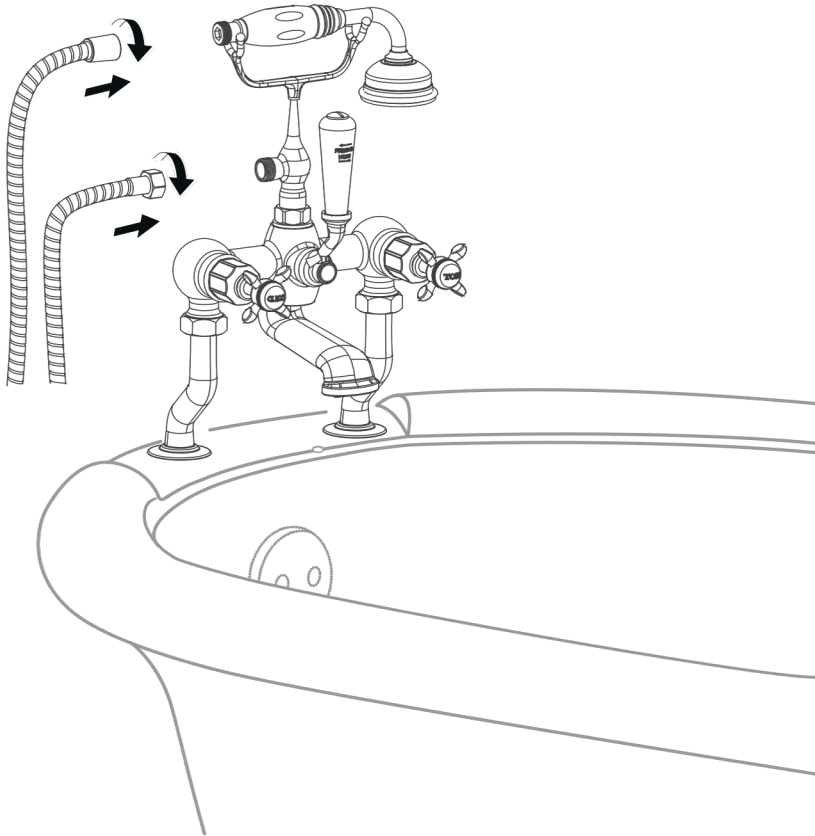

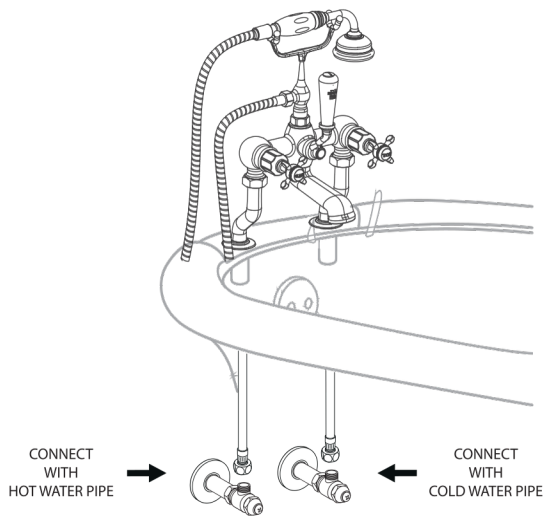

AFTER INSTALLATION

Ensure that all connections are tight. Ensure that the handle is in the off position. Turn on the drain and main water supply, and check for leaks. Repair as needed.

CARE & CLEANING

Your new tap is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with mild soap, rinse thoroughly with warm water and dry with a clean, soft cloth. Do not use abrasive cleaners, steel wool or harsh chemicals, as these will dull the finish. Failure to follow these instructions may void your warranty.

TROUBLE SHOOTING

If you've followed the instructions carefully and your tap still does not work properly, take these corrective steps.

Problem	Possible Cause	Solution
Insufficient water	- Aerator clogged	- Clean aerator, replace if necessary
Mixer stiff	- Cartridge defective	- Replace cartridge
Mixer dripping	- Cartridge defective	- Replace cartridge
Water leaks below handle	- Cartridge defective	- Replace cartridge
	- O-ring/rings defective	- Replace O-ring/rings
Water leaks at the connection	- Loose connection	- Tighten connection