


Installation Manual

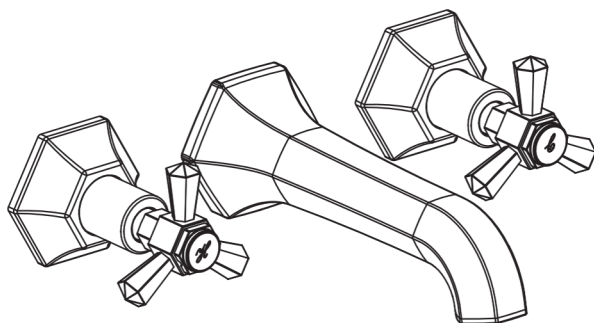

Apply for following models
11298/11299

Please keep this page for your online registration.

No. FIBTTBH39V1.0

Product image for reference





WARNING



CAUTION

If using solder for the installation of the tap; the tap seats, cartridges and washers will have to be removed before heating. Otherwise, the warranty will be voided on these parts.



Screwdriver



Electric Drill



Adjustable Wrench



Hexagon wrench

TECHNICAL DATA

Recommended water pressure: 7.25 - 43.5 psi

Max. Water pressure: 116 psi

Recommended hot water temp: 99.14 - 135.32 °F


Max. Hot water temp: 164.84 °F

Please know and follow all applicable local plumbing codes when setting the temperature on the water heater.

PARTS LIST

11	Tap Body	1
10	Wall Plug	2
9	Screw	2
8	Cold Cartridge	1
7	Flange	2
6	Cartridge Sleeve	2
5	Handle	2
4	Gasket	2
3	Screw	2
2	O-Ring	2
1	Cover	1
No.	Description	Quantity

21	Rubber Plug	2
20	Screw	2
19	Hot Cartridge	1
18	Cover	1
17	Plastic Spanner	1
16	Aerator	1
15	Spout	1
14	O-Ring	4
13	Adapter Connector	1
12	O-Ring	1
No.	Description	Quantity



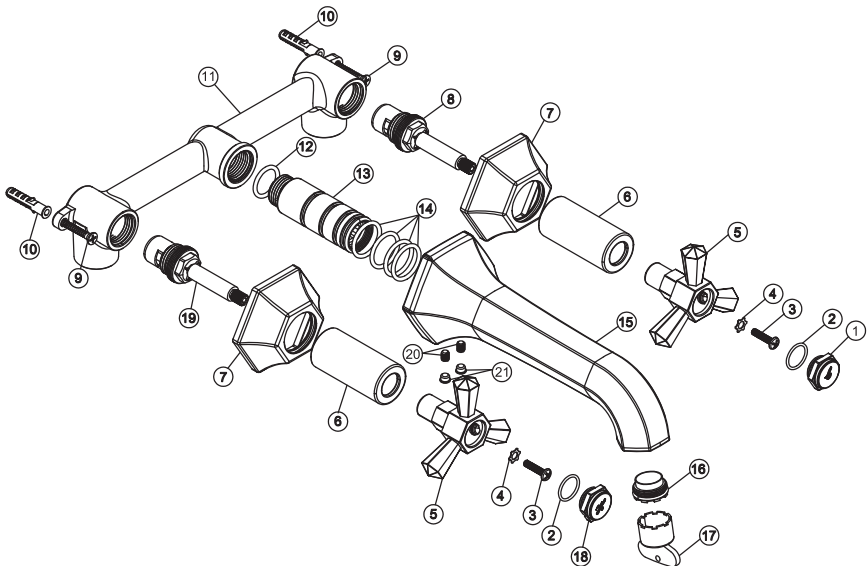


BEFORE INSTALLATION

- ⌘ Observe all local plumbing codes.
- ⌘ Make sure water supply is turned off.
- ⌘ Read these instructions carefully to ensure proper installation.
- ⌘ Cover your drain to avoid losing parts.
- ⌘ Check to make sure you have the following parts indicated below.




Please check you have all of these items in the box.

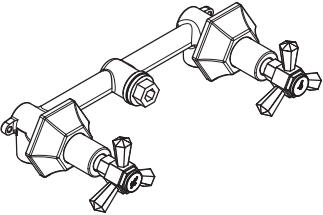		
Tap Body Assembly X1	Spout X1	Plastic Cover X2
		
Screw X2	Wall Plug X2	Plastic Spanner X1
		
Wrench X1	Rubber Plug X2	

INSTALLATION PROCEDURE


1

Remove the cover, screw, gasket, handle, and flange in sequence, then fit the plastic cover on the tap body.

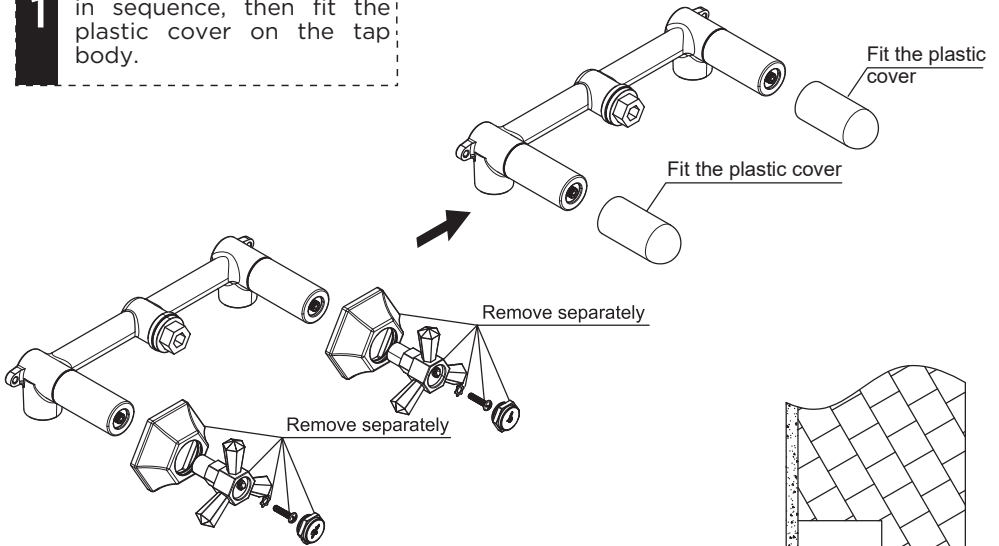

2


Drill holes in the wall recess to install the tap body, connect the hot and cold water pipes, then check for leaks, and finally tile the wall.

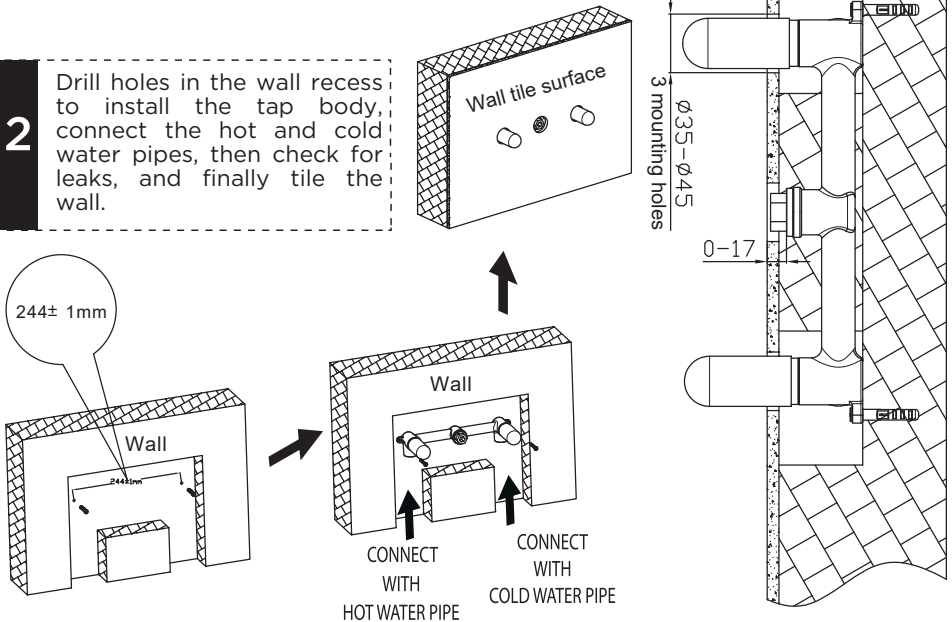

INSTALLATION PROCEDURE


3


Remove the plastic cover and plug, screw the adapter connector onto the tap body, and tighten it using an S12 Allen key (not supplied). Then fit the spout onto the connector, and secure it with the grub screws underneath. Finally install the rubber plugs.

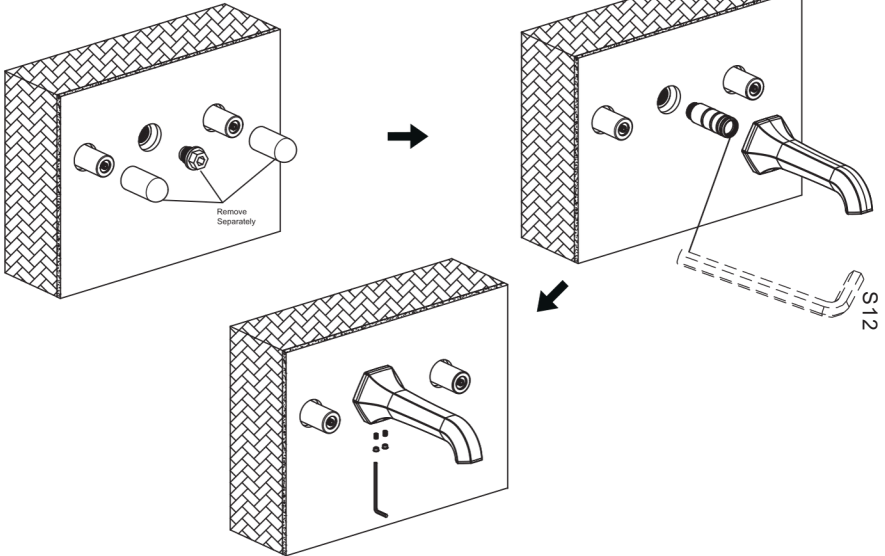

4

Reinstall the flange, handle, gasket, screws and decorative cover in sequence. Check for any leakage before finalizing the installation.

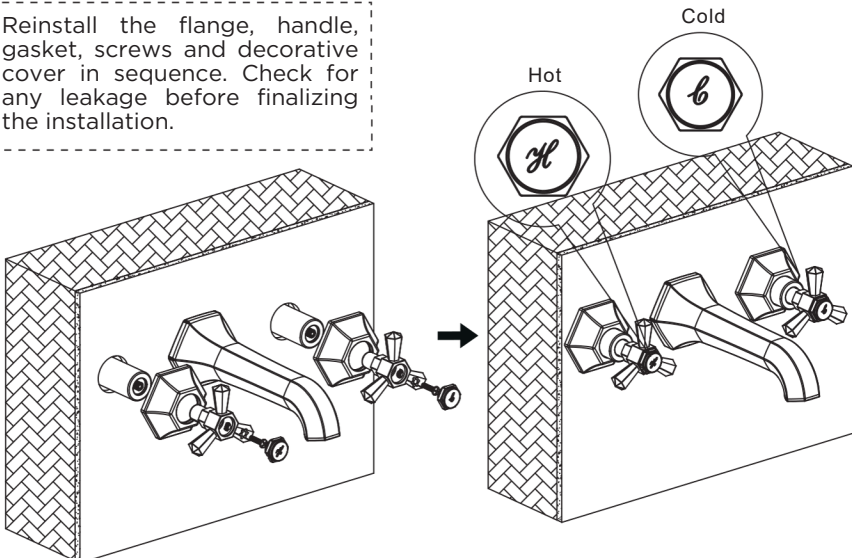

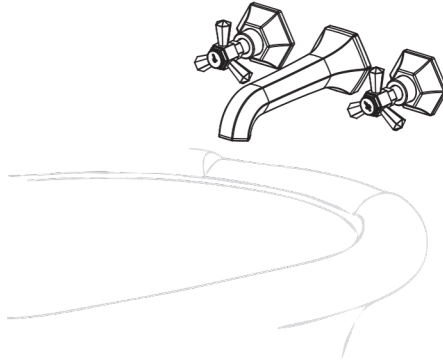

AFTER INSTALLATION

Ensure that all connections are tight. Ensure that the handle is in the off position. Turn on the drain and main water supply, and check for leaks. Repair as needed.

CARE & CLEANING

Your new tap is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with mild soap, rinse thoroughly with warm water and dry with a clean, soft cloth. Do not use abrasive cleaners, steel wool or harsh chemicals, as these will dull the finish. Failure to follow these instructions may void your warranty.

TROUBLE SHOOTING

If you've followed the instructions carefully and your tap still does not work properly, take these corrective steps.

Problem	Possible Cause	Solution
Insufficient water	- Aerator clogged	- Clean aerator, replace if necessary
Mixer stiff	- Cartridge defective	- Replace cartridge
Mixer dripping	- Cartridge defective	- Replace cartridge
Water leaks below handle	- Cartridge defective	- Replace cartridge
	- O-ring/rings defective	- Replace O-ring/rings
Water leaks at the connection	- Loose connection	- Tighten connection