


Installation Manual

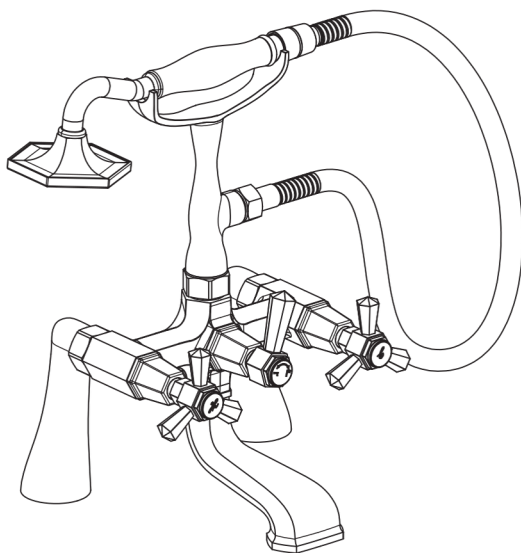

Apply for following models
12238/12239

Please keep this page for your online registration.

No. FIBTTBH40V1.0

Product image for reference




WARNING




CAUTION

If using solder for the installation of the tap; the tap seats, cartridges and washers will have to be removed before heating. Otherwise, the warranty will be voided on these parts.

TOOLS YOU MIGHT NEED



Electric Drill



Screwdriver



Adjustable
Wrench

TECHNICAL DATA

Recommended water pressure: 7.25 - 43.5 psi

Max. Water pressure: 116 psi


Recommended hot water temp: 99.14 - 135.32 °F

Max. Hot water temp: 164.84 °F

Please know and follow all applicable local plumbing codes when setting the temperature on the water heater.

PARTS LIST

11	Plastic Spanner	1
10	Nut	2
9	Washer	4
8	Offset Connector	2
7	Washer	2
6	Hose	1
5	Washer	2
4	Shower Handset	1
3	Handset Holder	1
2	Washer	1
1	Tap Body	1
No.	Description	Quantity

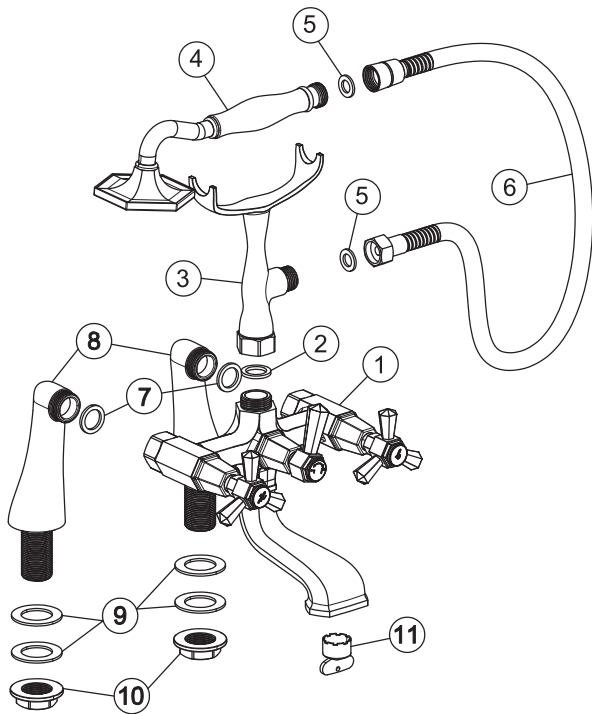


BEFORE INSTALLATION

- ⌘ Observe all local plumbing codes.
- ⌘ Make sure water supply is turned off.
- ⌘ Read these instructions carefully to ensure proper installation.
- ⌘ Cover your drain to avoid losing parts.
- ⌘ Check to make sure you have the following parts indicated below.




Please check you have all of these items in the box.

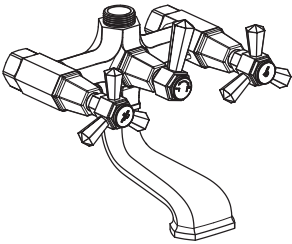


Tap Body
X1



Offset Connector
X2

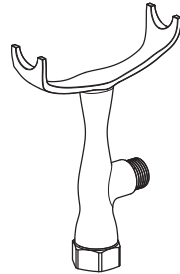

Handset Holder
X1




Hose
X1



Washer
X4



Nut
X2



Shower Handset
X1




Plastic Spanner
X1

INSTALLATION PROCEDURE


1

Remove the washer and nut from the offset connectors, then install the offset connectors into the tap. Check the left and right orientation of the offset connectors, and ensure a washer (7) is placed between the offset connector and the tap body.

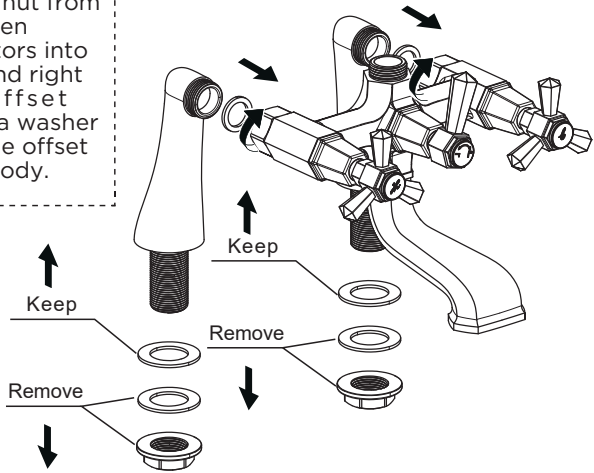

2


Connect the hex nut end of the shower hose to the handset holder, and connect the other end to the shower handset. After installation, place the shower handset on the handset holder. (Note: There are washers on both ends of the hose.)

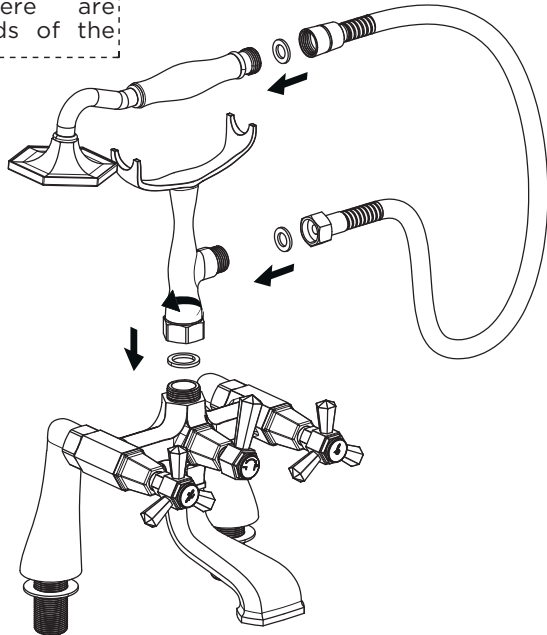


INSTALLATION PROCEDURE

3

Insert the assembled left and right offset connectors (8) into the two mounting holes in the bathtub. Then install the washers and secure the tap body to the bathtub using the plastic nuts. Check all joints and connections for leaks.

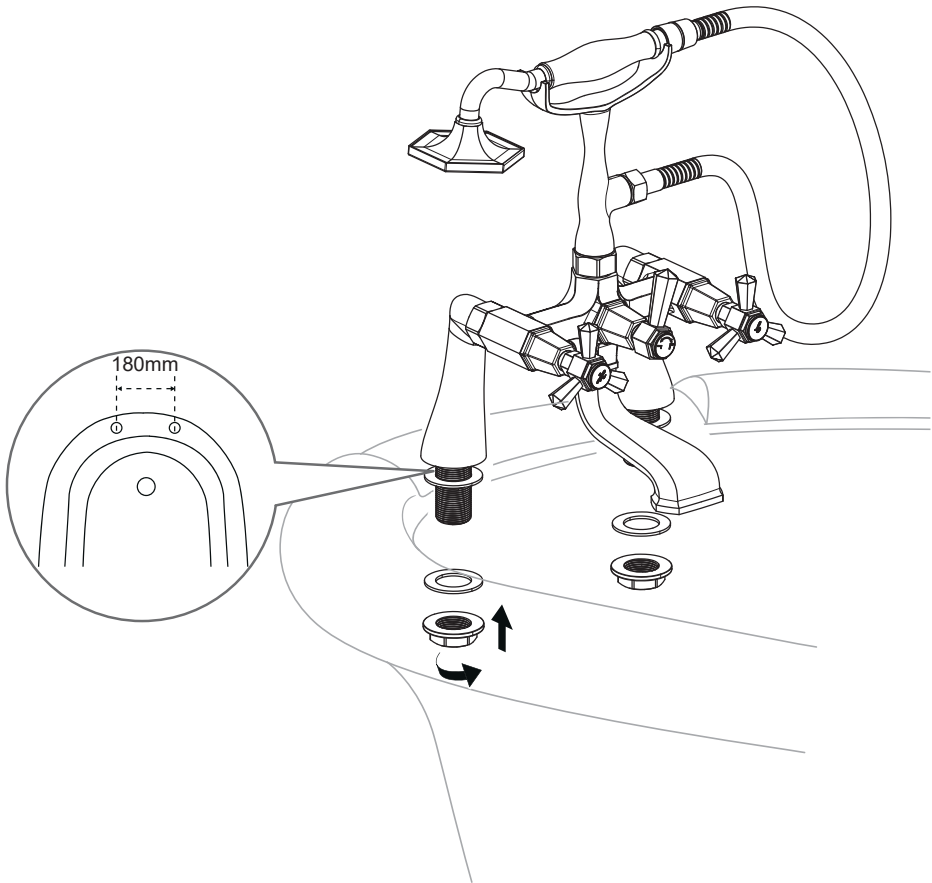

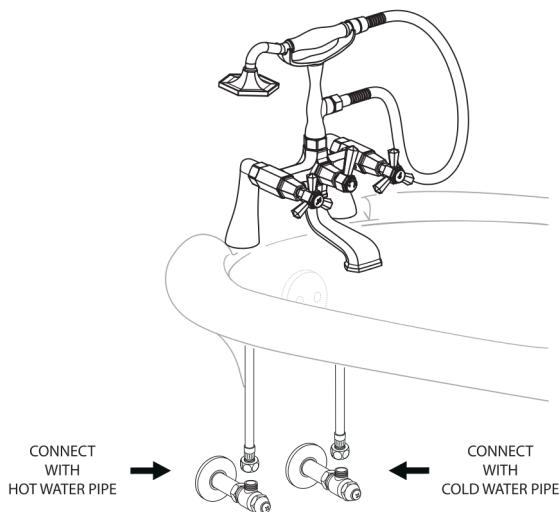

AFTER INSTALLATION

Ensure that all connections are tight. Ensure that the handle is in the off position. Turn on the drain and main water supply, and check for leaks. Repair as needed.

CARE & CLEANING

Your new tap is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with mild soap, rinse thoroughly with warm water and dry with a clean, soft cloth. Do not use abrasive cleaners, steel wool or harsh chemicals, as these will dull the finish. Failure to follow these instructions may void your warranty.

TROUBLE SHOOTING

If you've followed the instructions carefully and your tap still does not work properly, take these corrective steps.

Problem	Possible Cause	Solution
Insufficient water	- Aerator clogged	- Clean aerator, replace if necessary
Mixer stiff	- Cartridge defective	- Replace cartridge
Mixer dripping	- Cartridge defective	- Replace cartridge
Water leaks below handle	- Cartridge defective	- Replace cartridge
	- O-ring/rings defective	- Replace O-ring/rings
Water leaks at the connection	- Loose connection	- Tighten connection