


Installation Manual

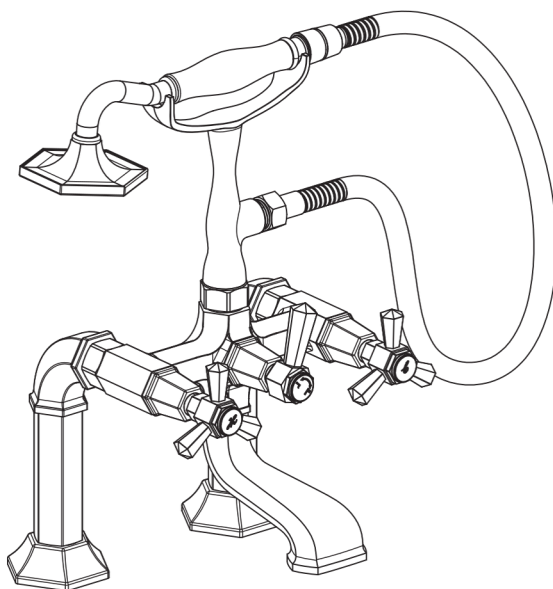

Apply for following models
12240/12241

Please keep this page for your online registration.

No. FIBTTBH41V1.0

Product image for reference




WARNING




CAUTION

If using solder for the installation of the tap; the tap seats, cartridges and washers will have to be removed before heating. Otherwise, the warranty will be voided on these parts.

TOOLS YOU MIGHT NEED



Electric Drill



Screwdriver



Adjustable
Wrench

TECHNICAL DATA

Recommended water pressure: 7.25 - 43.5 psi

Max. Water pressure: 116 psi

Recommended hot water temp: 99.14 - 135.32 °F


Max. Hot water temp: 164.84 °F

Please know and follow all applicable local plumbing codes when setting the temperature on the water heater.

PARTS LIST

10	Flange	2
9	O-Ring	2
8	Inlet Connector	2
7	Washer	2
6	Hose	1
5	Washer	2
4	Shower Handset	1
3	Handset Holder	1
2	Washer	1
1	Tap Body	1
No.	Description	Quantity

14	Plastic Spanner	1
13	Nut	2
12	Washer	2
11	Washer	2
No.	Description	Quantity







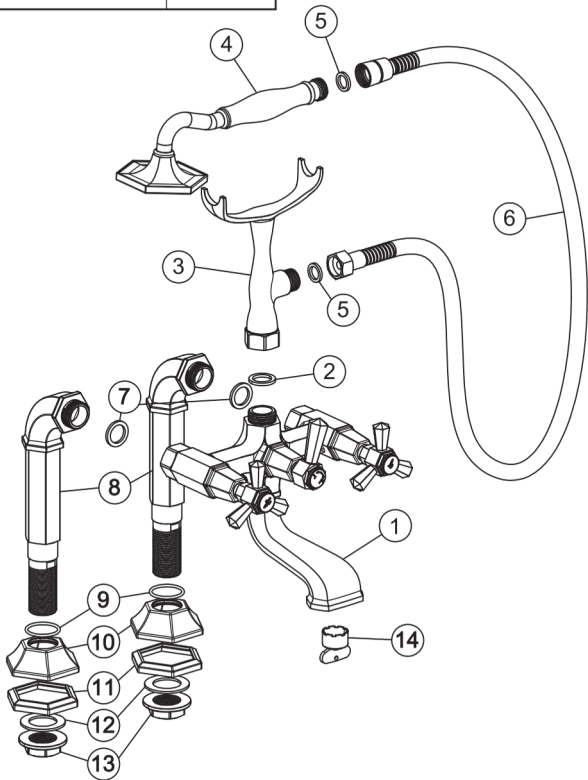


BEFORE INSTALLATION

- ⌘ Observe all local plumbing codes.
- ⌘ Make sure water supply is turned off.
- ⌘ Read these instructions carefully to ensure proper installation.
- ⌘ Cover your drain to avoid losing parts.
- ⌘ Check to make sure you have the following parts indicated below.




Please check you have all of these items in the box.

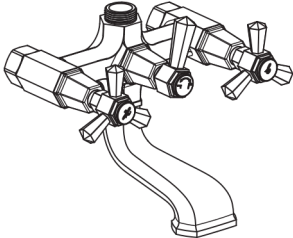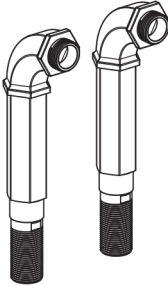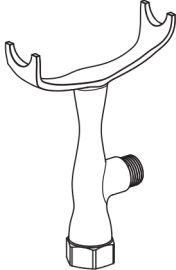 Tap Body X1	 Inlet Connector X2	 Handset Holder X1
 Hose X1	 Flange X2	 Nut X2
 Shower Handset X1	 Plastic Spanner X1	 Washer X2
 Washer X2		

INSTALLATION PROCEDURE


1

Remove the washer and nut from the inlet connectors, then assemble them with the tap body, and ensure a washer (7) is placed between the inlet connector and the tap body.

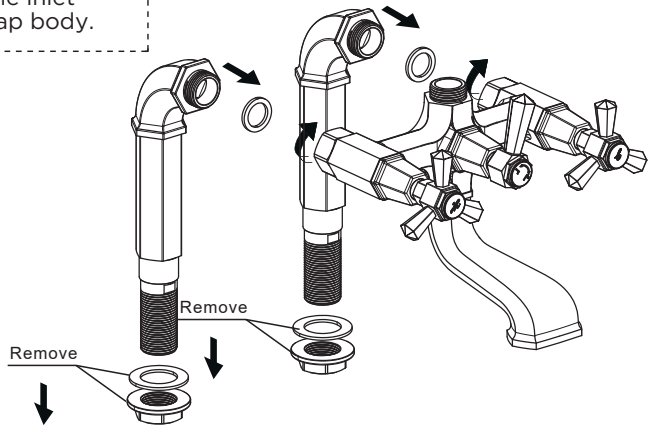

2


Connect the hex nut end of the hose to the handset holder, and connect the other end to the shower handset. After installation, place the shower handset on the handset holder. (Note: There are washers (5) on both ends of the hose.)

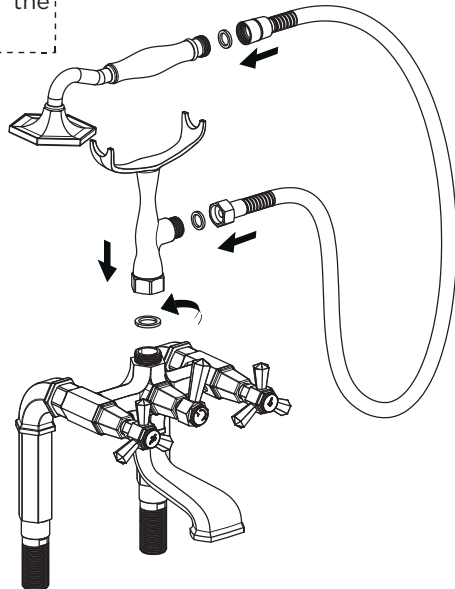


INSTALLATION PROCEDURE

3

Install the flanges (10) and washers (11) onto the inlet connectors (8), then insert them into the two mounting holes in the bathtub. Then install the washers (12) and secure the tap body to the bathtub using the nuts (13). Check all joints and connections for leaks.

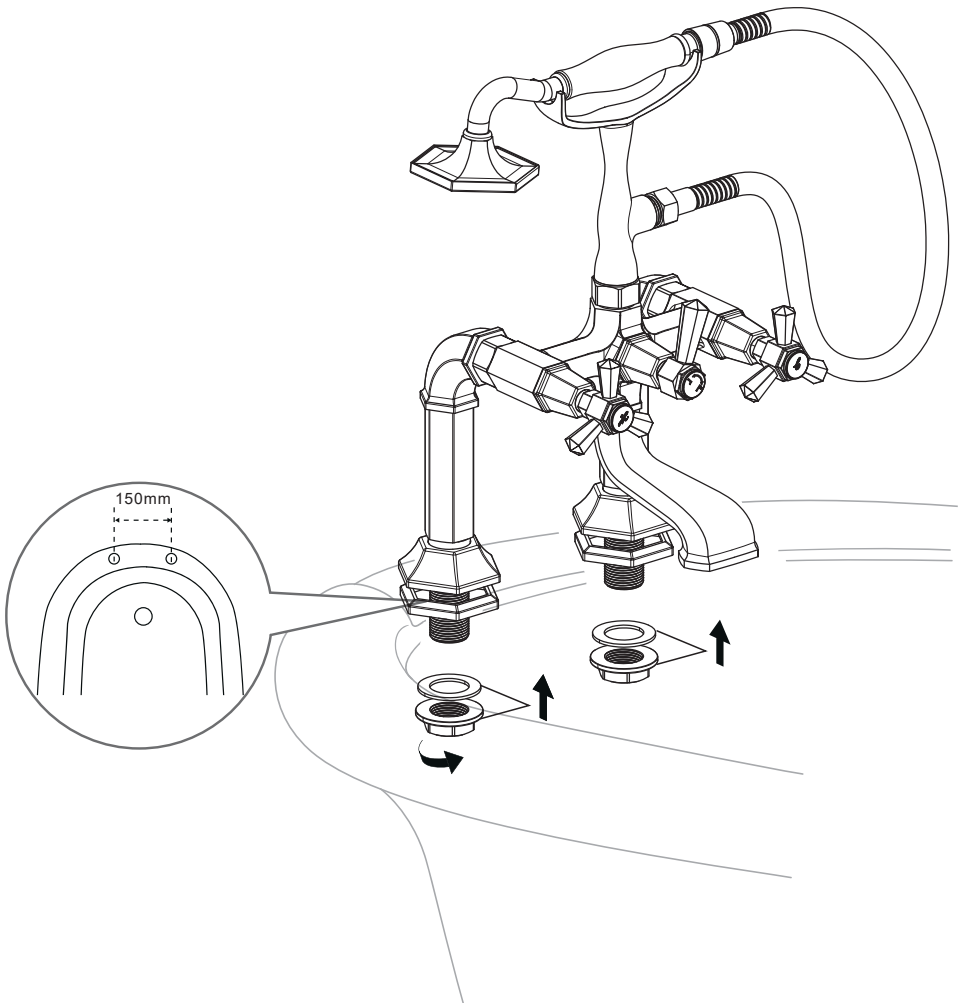

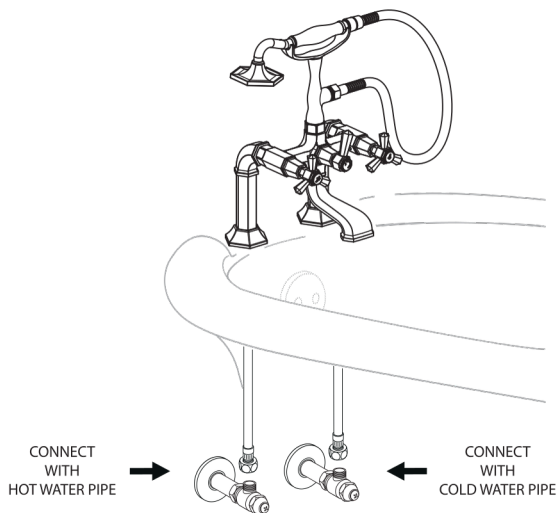

AFTER INSTALLATION

Ensure that all connections are tight. Ensure that the handle is in the off position. Turn on the drain and main water supply, and check for leaks. Repair as needed.

CARE & CLEANING

Your new tap is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with mild soap, rinse thoroughly with warm water and dry with a clean, soft cloth. Do not use abrasive cleaners, steel wool or harsh chemicals, as these will dull the finish. Failure to follow these instructions may void your warranty.

TROUBLE SHOOTING

If you've followed the instructions carefully and your tap still does not work properly, take these corrective steps.

Problem	Possible Cause	Solution
Insufficient water	- Aerator clogged	- Clean aerator, replace if necessary
Mixer stiff	- Cartridge defective	- Replace cartridge
Mixer dripping	- Cartridge defective	- Replace cartridge
Water leaks below handle	- Cartridge defective	- Replace cartridge
	- O-ring/rings defective	- Replace O-ring/rings
Water leaks at the connection	- Loose connection	- Tighten connection