Installation Manual

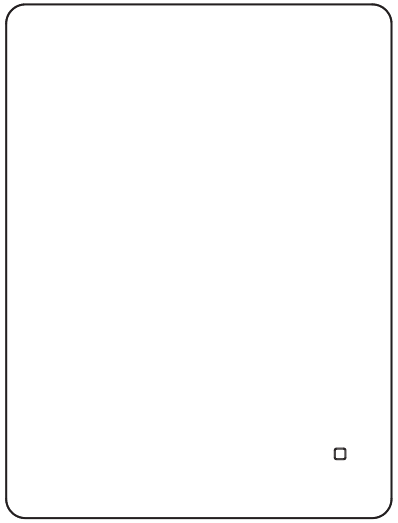

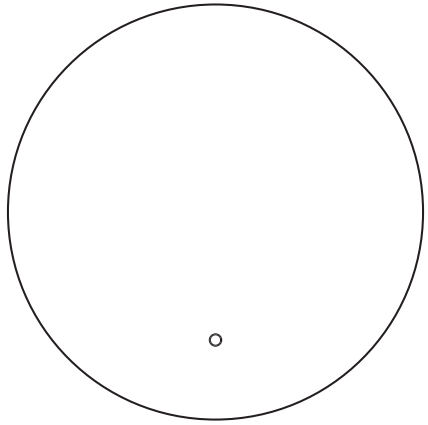

Apply for all electric mirrors with color change/single switch (with defogger function)

Please keep this page for your online registration.

FIFUMCC01V2.0

Content

Important Notes 3
Getting Started 5
Installing Electric Mirrors 6
Operating instruction 8

Important Notes

Electrical Safety and Standards

- Products are manufactured to class Ⅱ and do not require an earth connection (see Wiring Diagram).
- Mains power supply must be switched off prior to starting electrical installation.
- If there are only two wires coming from your power supply, fitting can be wired to an unearthed circuit.
- All electrical products should be fitted by a qualified electrician in accordance with national wiring regulations (BS61).
- Before drilling, ensure there are no hidden cables or pipes in the wall.
- Products are for in door use only.
- Moisture must not come into contact with the electrical components.
- Products rated ip44 can be installed in bathroom zone 2 only (see Bathroom Zones Diagram).

Compliance

Products in this manual comply with the following safety standards: BS EN 60598-1: 2008+ A11: 2009, EN6059₩-2-1: 1989.

Other Safety Notes

- Work from a suitable platform when operating at heights.
- Wear suitable eye protection when drilling.
- Be careful when using power tools near water.

Wall Types

- Fixings supplied are generally for solid walls.
- For dry stud walls, purchase suitable fixings.
- For advice on suitable wall fixings, contact your local DIY store.
- If fitting on tiles, use a ceramic drill bit and insert wall plugs below the tile.

Please place the product in a well ventilated environment to avoid oxidation caused by long-term humidity.

Wirlng Diagram

Bathroom Zoes Diagram

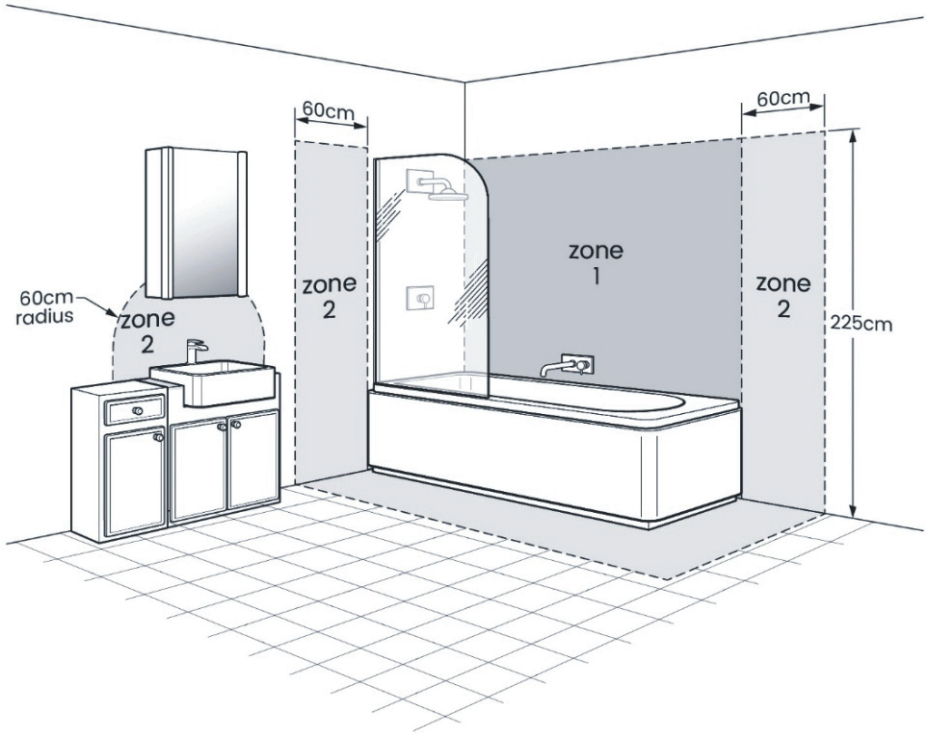

Getting Started

Read the ***Important Notes*** on pages 2 and 3 before starting.

Fixtures

Fixtures are provided for certain mirror types. Examples of fixtures are provided below.

	Recommended max load	Wall types suitable for	
		Brick	Wood
Screw and raw plug	20kg	√	√

Tools Required

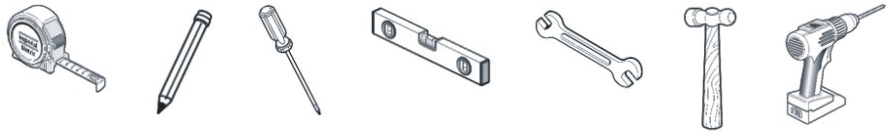

Installing Electric Mirrors

1 Choose the orientation of the mirror (Vertical/Horizontal).

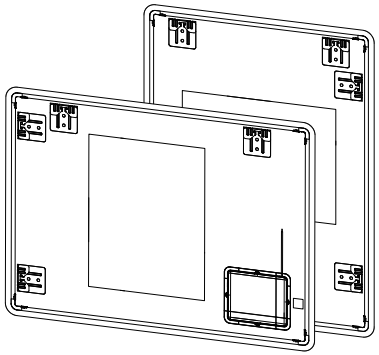

2 Take measurements and mark wall.

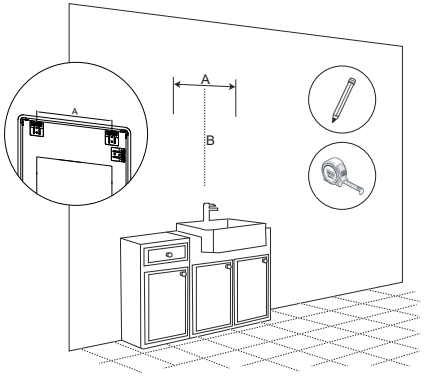

A= Distance between strap hangers
B= Centre line from A

3 Drill holes based on the fastening points marked and attach fastenings to the wall.



4 Make the electrical connections

Wiring Diagram

5 Place mirror on the screws fitted and switch on.

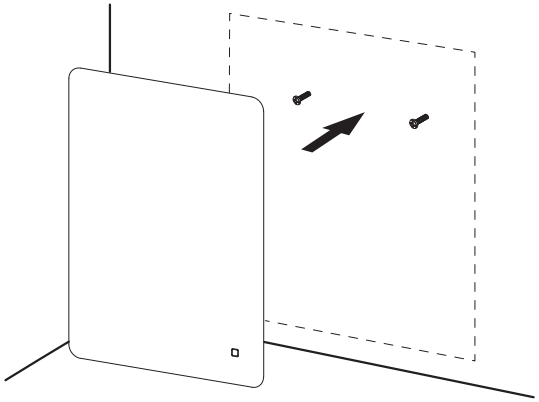

Operating instruction

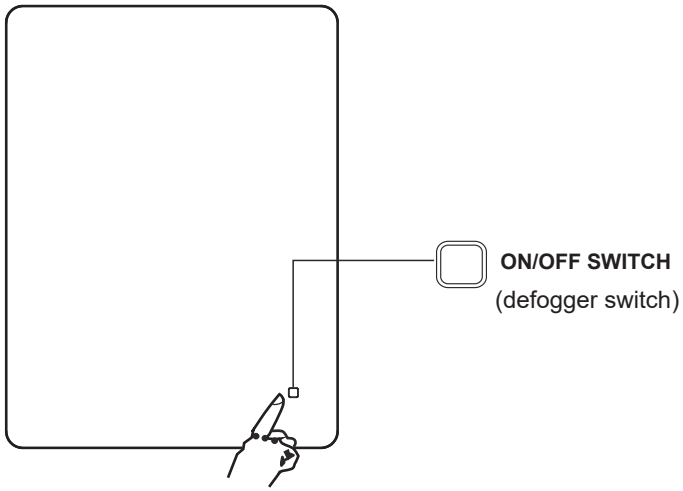

ON/OFF SWITCH

- Short press ON/OFF switch (by less than 1 second), the LED lights will be turned on. Then double tap to change colors (3000K/4000K/6500K).

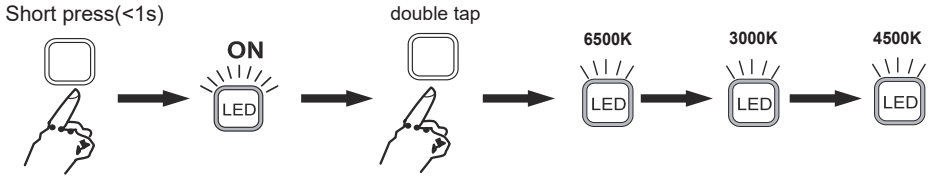

- Long press the ON/OFF SWITCH and hold on , the DIMMER function will be activated.The brightness can be adjusted from 5%-100%.

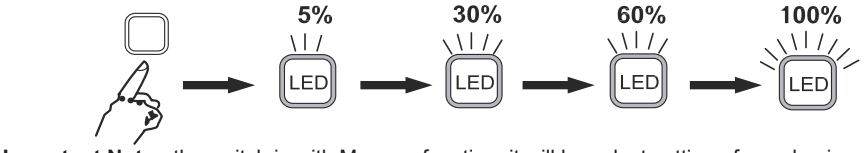

Important Notes:the switch is with Memory function, it will keep last setting of your luminance and on/off status.

- when the light is on, Anti-fog pad starts working; when the light is off, Anti-fog pad stops working.

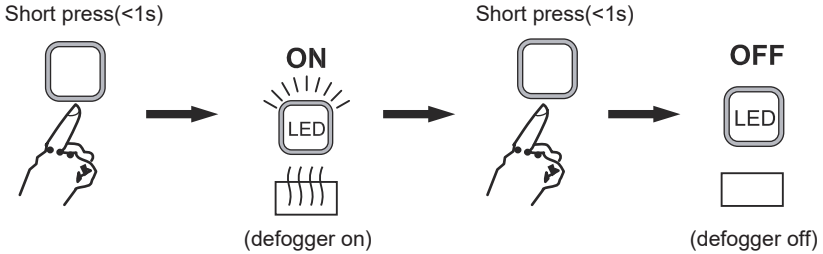

Important Notes: Anti-fog function automatically turns off after 1 hour.
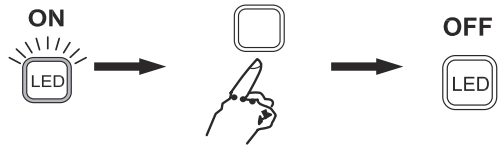
- In Standy Mode - Hold the touch sensor to turn off the On/Off illuminated circle.