


Installation Manual

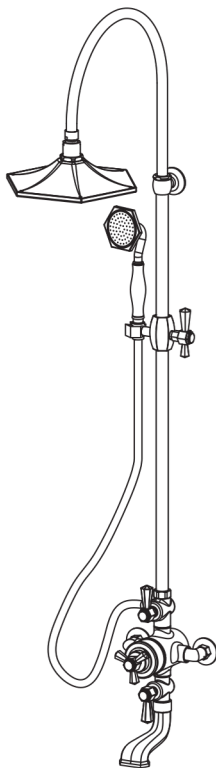

Apply for following models
23097/23098

Please keep this page for your online registration.

No. FISHTBH28V1.0

Product image for reference

TECHNICAL DATE

Operating Pressure: 0.05 MPa – 1 MPa
Recommended Pressure: 0.1 MPa – 0.5 MPa
Cold water supply temperature: 4°C – 29°C


Hot water supply temperature: 50°C – 75°C
Factory-set maximum outlet water temperature: 45°C

IMPORTANT NOTES:

1. Do not supply water containing excessive debris to this tap.
2. Before installation, thoroughly clean the pipes to remove any debris left from construction to prevent blockage.

BEFORE INSTALLATION


1. Observe all local plumbing codes.
2. Make sure water supply is turned off.
3. Please check for any hidden pipes and cables before drilling holes in the wall.
4. Read these instructions carefully to ensure proper installation.
5. Cover your drain to avoid losing parts.
6. Check to make sure you have the following parts indicated below.
7. If using solder for the installation of the tap, the tap seats, cartridges and washers will have to be removed before heating. Otherwise, the warranty will be voided on these parts.



Tap Body



Decorative Flange



Spout



Aerator wrench



Hose



Wall Plug




Screw



S2.5 Hex Key




S2 Hex Key



Shower Head



Shower Handset


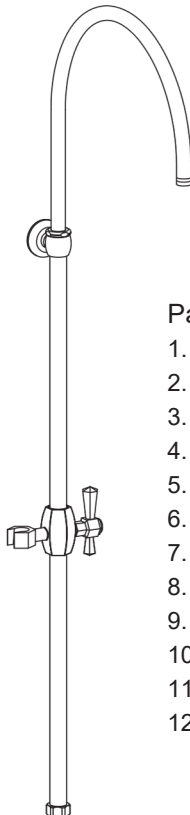


Shower Slide Bar

Parts List




1. Tap Body	x1
2. Decorative Flange	x2
3. Spout	x1
4. Hose	x1
5. Wall Plug	x6
6. S2.5 Hex Key	x1
7. Screw	x6
8. S2 Hex Key	x1
9. Shower Handset	x1
10. Shower Head	x1
11. Aerator wrench	x1
12. Shower Slide Bar	x1

INSTALLATION PROCEDURE

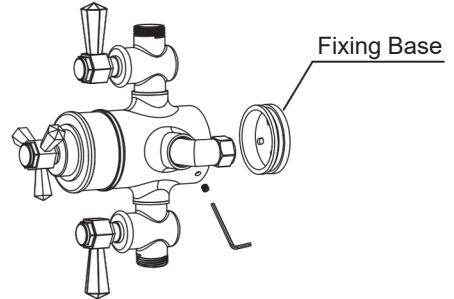
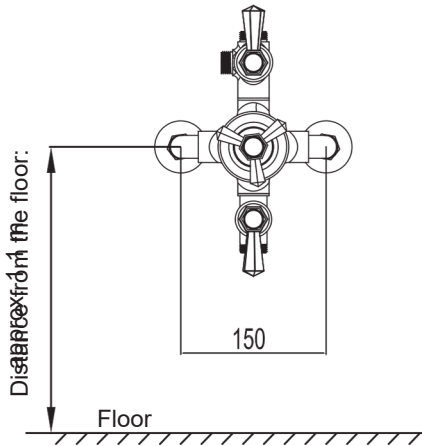


1. Place the tap body (1) against the wall, to ensure the position of the tap body as shown in the image.


2. Loosen the grub screw at the bottom of the body body (1), then remove the fixing base.



3. Place the fixing base against the wall, mark the drilling positions, drill holes at the marked position, insert the wall plugs (5), and secure the fixing base to the wall with screws (7).

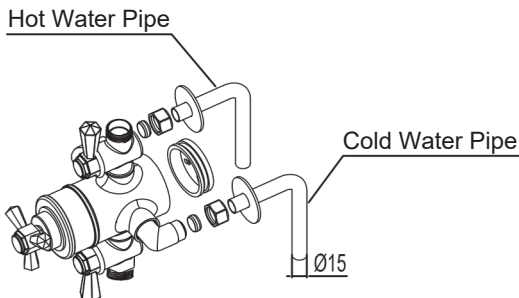

4. Unscrew the hex nut and remove the copper ring from the tap body (1). Pass the Ø15mm connecting pipe through the decorative flange (2), hex nut and copper ring, then insert it into the wall elbow. Tighten the hex nut to seal. Attach the tap body (1) onto the fixing base, then tighten the grub screw.

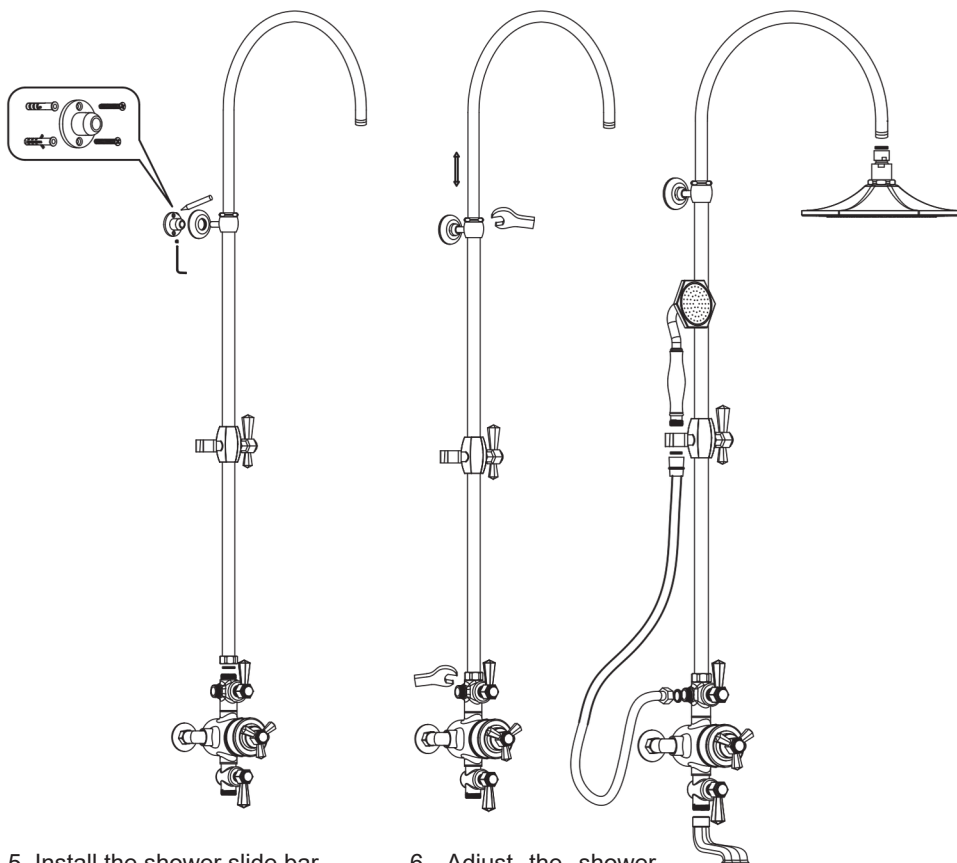

5. Install the shower slide bar (12) onto the tap body. Position the bracket against the wall and mark the hole positions. Unscrew the grub screw at fixing base, remove the bracket from the bar (12). Drill holes at the marked positions and insert the wall plugs (5). Secure the fixing base to the wall using screws (7). Then attach the bar onto the fixing base, tighten the grub screw at fixing base.

6. Adjust the shower slide bar to the proper height and tighten it with a wrench.

7. Finally, fit the shower handset (9), shower head (10) and spout (3). Turn on the water valve and check that there is no leakage at the connections.

Aftercare:

The end user is required to regularly maintain and clean product using warm soapy water and a soft cloth for the product warranty to be valid. Surfaces should be maintained using a clean damp cloth, no corrosive and abrasive agents or materials should be used or come into contact with the surface finish, as this will invalidate your product warranty.