


Installation Manual

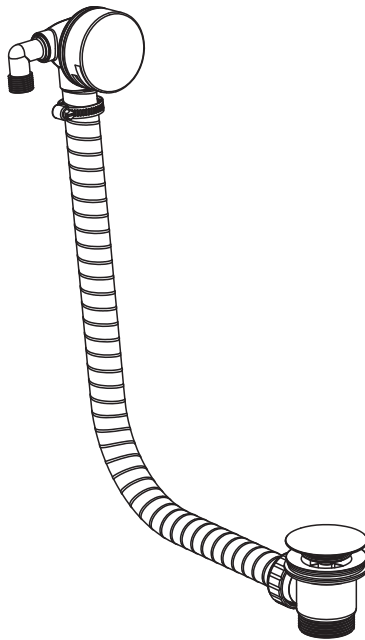

Apply for following models
55225/55226/55227/55228/55229
55230

Please keep this page for your online registration.

No. **FIACB12V1.0**

Product image for reference



Please follow these care instructions to ensure your product retains it's high quality finish and please retain this leaflet for future reference.

Installation Notice


1. Floor drain should be installed in the location of the product.
2. Flush pipes to get rid of any debris blocked in pipes before installation.
3. After installation, turn all the joints to make sure they are firmly connected. Then turn water on and off repeatedly to ensure there are no leaks around the joints then the product can be used normally at this stage.

Operation Notice

1. The product is used between water pressure 0.5 to 4 bar, water temperature 0-90c.
2. The product is suitable for being installed in the bathtub which thickness is 5~15 mm.
3. Regularly clean the tap with soft damp cloth.
4. Read all the instructions completely before proceeding.

Installation

1. Remove waste cover - this includes cover (1), seal washer (2), click clack mechanism (3) .
2. Unscrew the waste flange (4) and place silicone washer (5) over the hole on the bottom of the bath. Place waste flange (4) through the silicone washer (5) and the bath hole. Put rubber washer (6) over the bottom the of the waste flange (4) and screw on the waste body (7).
3. Unscrew the overflow cover (16), foam washer (15) and rubber washer (14) from the overflow elbow (13).
4. Place the rubber washer (14) and the overflow elbow on the back of the bath and line up with the overflow hole. from the front of the bath, re-attach the overflow cover (16), foam washer (15).
5. Connect the hose (11) to the overflow elbow (13) using the clamp (12), do not over tighten.
6. Attach the hose (11) to the waste body (7) using the plastic nut.
7. Re-attach the waste cover (1)
8. Fill the bath with water and check all joints to ensure there are no leaks. This is the best done in stages starting with a small amount of water before fully filling the bath

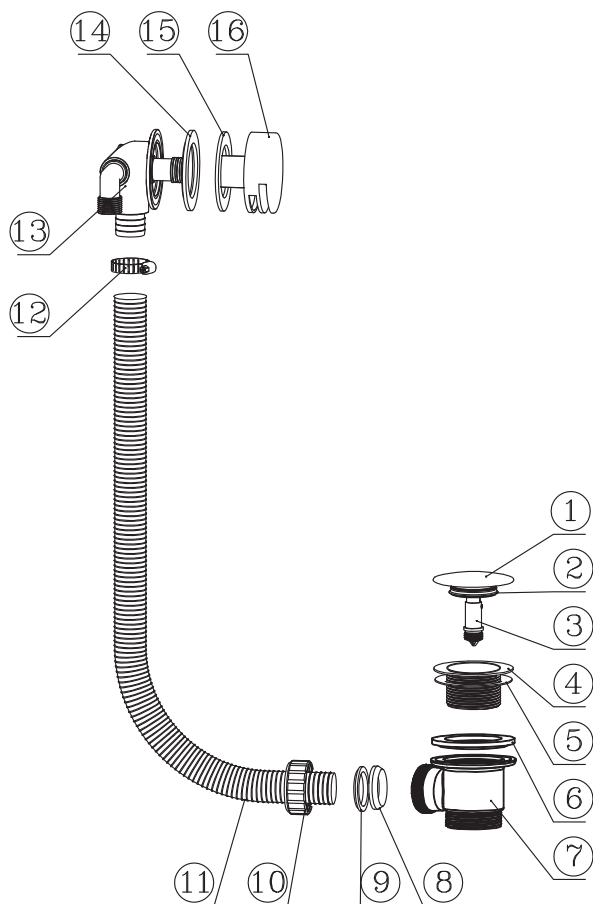

1. Cover
2. Seal Washer
3. Click Clack Mechanism
4. Waste Flange
5. Silicone Washer
6. Rubber Washer
7. Waste Body
8. Rubber Seal Washer

9. Plastic Ring
10. Plastic Screw
11. PVC Hose
12. Clamp
13. Overflow Elbow
14. Rubber Washer
15. Foam Washer
16. Overflow Cover

Aftercare:

The end user is required to regularly maintain and clean product using warm soapy water and a soft cloth for the product warranty to be valid.

Surfaces should be maintained using a clean damp cloth, no corrosive and abrasive agents or materials should be used or come into contact with the surface finish, as this will invalidate your product warranty.