


Installation Manual

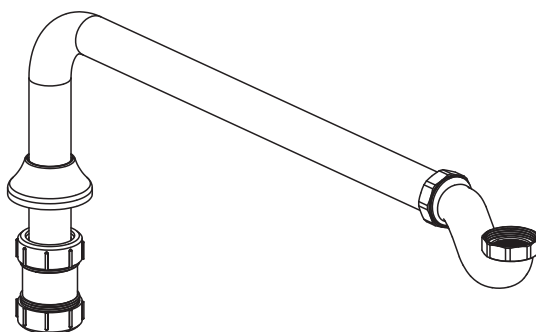

Apply for following models
55240/55241/55242

Please keep this page for your online registration.

No. FIACTBH15V1.0

Product image for reference




Installation Procedure

1. Connect trap to bath waste ensuring rubber washer is in place.
2. Cut outlet tube to required length(for wall or floor outlet).
3. Slide free nut onto outlet tube, flanged side first.
- 4.Place rubber seal onto outlet pipe.
- 5.Tighten free nut onto trap.
6. Fit flange over short end of outlet tube.
- 7.Attach multi-fit connector to short end of outlet tube.
- 8.Check for leaks.
- 9.Push flange against floor or wall.

IMPORTANT NOTE.

Always release the captive nut before attempting to align the outlet tube.
Failure to do so will result in damage to the sealing components.

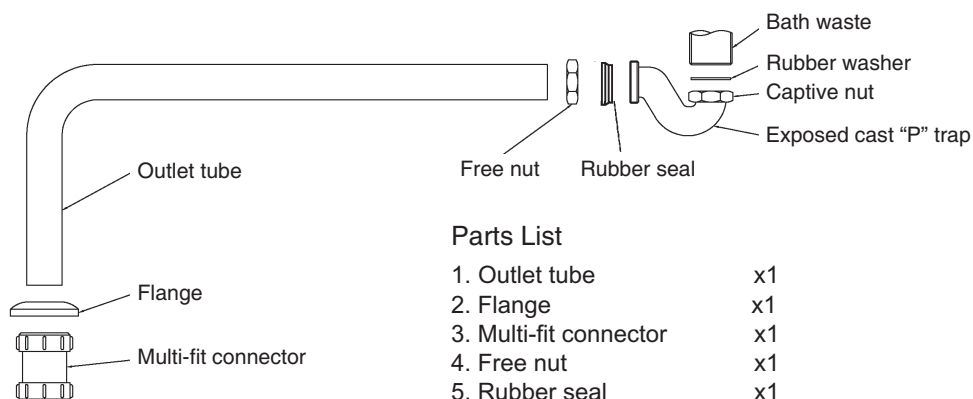

Parts List

1. Outlet tube	x1
2. Flange	x1
3. Multi-fit connector	x1
4. Free nut	x1
5. Rubber seal	x1
6. Exposed cast "P" trap	x1
7. Captive nut	x1
8. Rubber washer	x1

Aftercare:

The end user is required to regularly maintain and clean product using warm soapy water and a soft cloth for the product warranty to be valid.

Surfaces should be maintained using a clean damp cloth, no corrosive and abrasive agents or materials should be used or come into contact with the surface finish, as this will invalidate your product warranty.