
Installation Manual

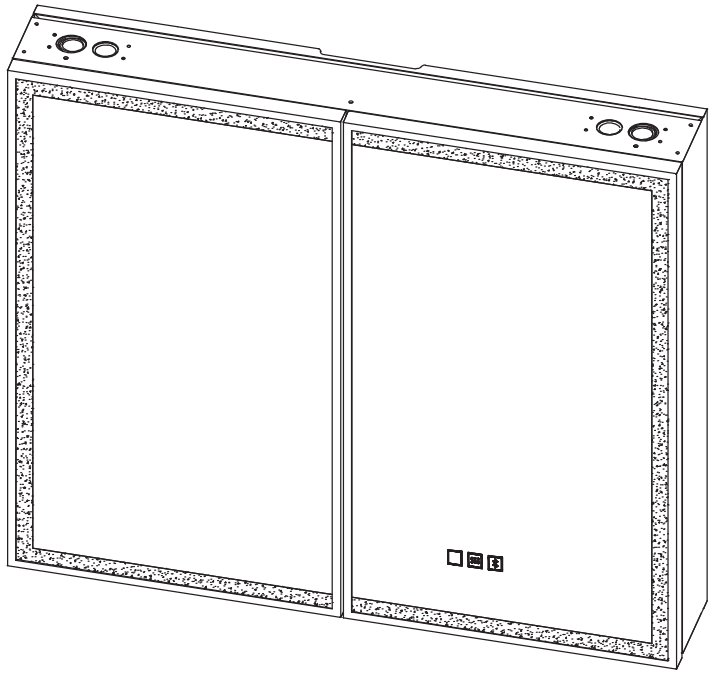

Apply for all electric mirror cabinets with color change/triple switch (with defogger,bluetooth function)

Please keep this page for your online registration. FIFUMCC10V1.0

Content

Important Notes 3

Getting Started 5

Installing Electric Mirror Cabinets 6

Operating instruction 8

Important Notes

Electrical Safety and Standards

- Products are manufactured to class Ⅱ and do not require an earth connection (see Wiring Diagram).
- Mains power supply must be switched off prior to starting electrical installation.
- If there are only two wires coming from your power supply, fitting can be wired to an unearthed circuit.
- All electrical products should be fitted by a qualified electrician in accordance with national wiring regulations (BS61).
- Before drilling, ensure there are no hidden cables or pipes in the wall.
- Products are for in door use only.
- Moisture must not come into contact with the electrical components.
- Products rated ip44 can be installed in bathroom zone 2 only (see Bathroom Zones Diagram).

Compliance

Products in this manual comply with the following safety standards: BS EN 60598-1: 2008+ A11: 2009, EN6059₩-2-1: 1989.

Other Safety Notes


- Work from a suitable platform when operating at heights.
- Wear suitable eye protection when drilling.
- Be careful when using power tools near water.

Wall Types


- Fixings supplied are generally for solid walls.
- For dry stud walls, purchase suitable fixings.
- For advice on suitable wall fixings, contact your local DIY store.
- If fitting on tiles, use a ceramic drill bit and insert wall plugs below the tile.

Please place the product in a well ventilated environment to avoid oxidation caused by long-term humidity.

Wirlng Diagram



Bathroom Zone Diagram

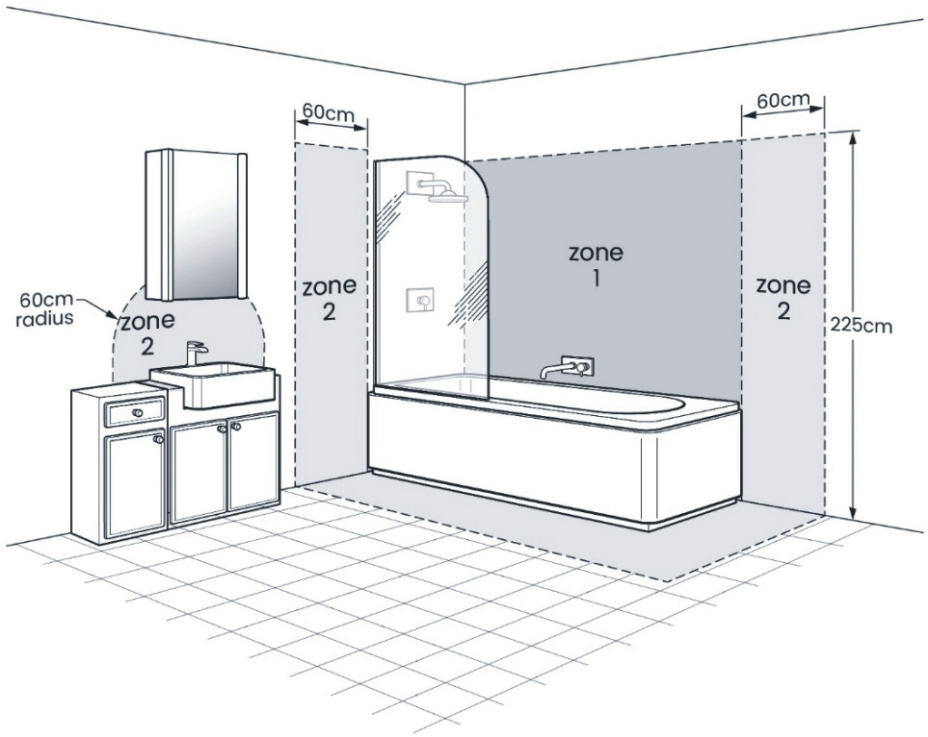

Getting Started

Read the ***Important Notes*** on pages 2 and 3 before starting.

Fixtures Included


Fixtures are provided for certain mirror cabinet types. Examples of fixtures are provided below.

	Recommended max load	Wall types suitable for	
		Brick	Wood
x5 x5 x2 x1 Fixing bracket,screw,wall plug and Wall mount bracket	70KG	√	√

Other Included Accessorles


Cabinet size	Junction box	Double sided tape	Glass shelf
			
W500xH700	1 pc	1 pc	2 pcs
W600xH700	1 pc	1 pc	2 pcs
W800xH700	1 pc	1 pc	4 pcs
W1000xH700	1 pc	1 pc	4 pcs
W1200xH700	1 pc	1 pc	4 pcs

Tools Required

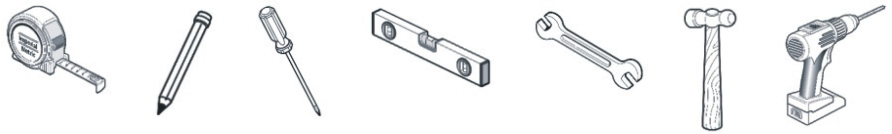


Installing Electric Mirror Cabinets


1 Mark the drilling positions of bottom bracket.




2 Fix the bottom bracket in place.




3 Insert the top hanging bracket into the center slot, then slide it to both sides.

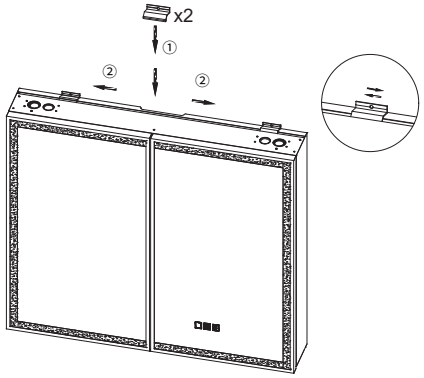


4 Lower the mirror cabinet against the wall and engage it with the bottom bracket.

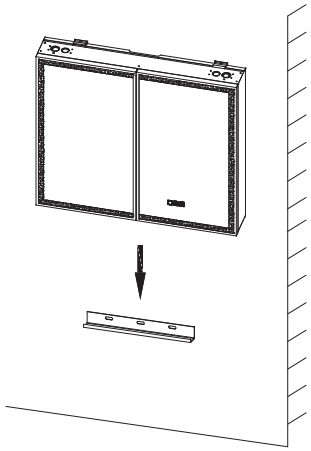


5 Mark the drilling positions.

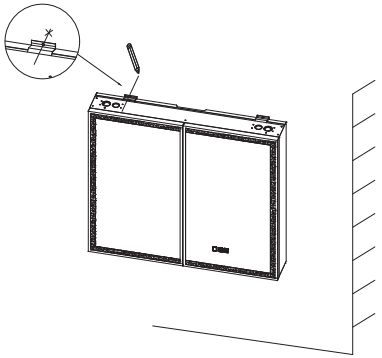


6 Drill the holes at the marked positions and insert the wall plugs.



7 Turn off the power.




8 Make the electrical connections.
Use a double-sided tape to secure the junction box to the back of the cabinet.

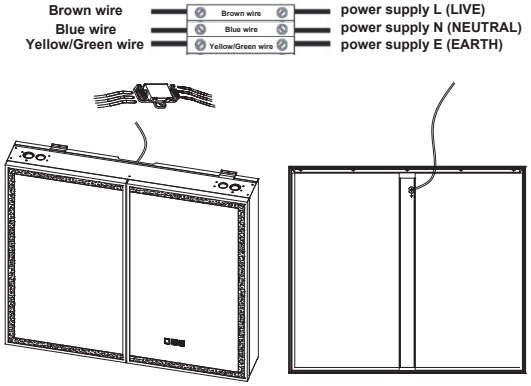


Installing Electric Mirror Cabinets


9 Lower the mirror cabinet against the wall and engage it with the bottom bracket.

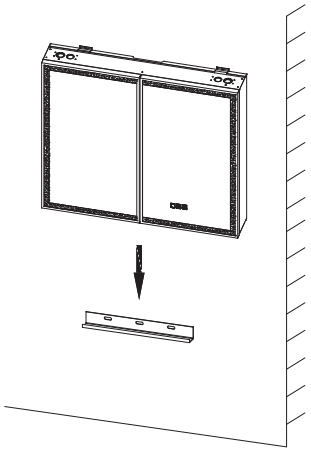


10 Fix mounting bracket.

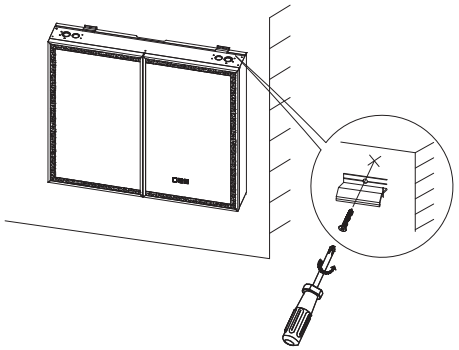


11 Turn on the power.




12 Adjust and secure the shelf supports.

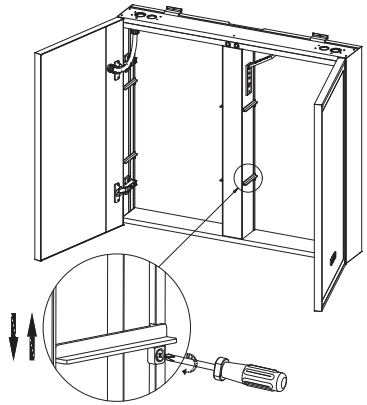

13 Install the shelves.




Hinge Adjustment.

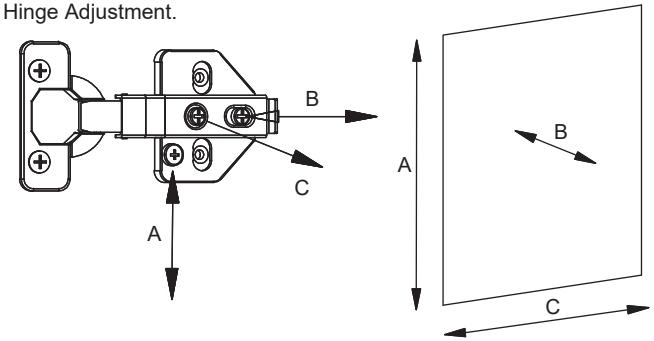


Operating instruction

Infrared Sensor:
Controls the internal cabinet light.
The light turns on when the door is opened and turns off when the door is closed.

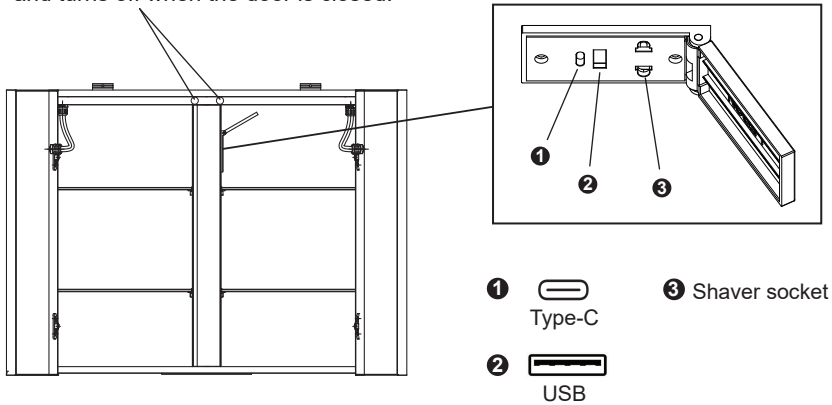


Operating Instruction

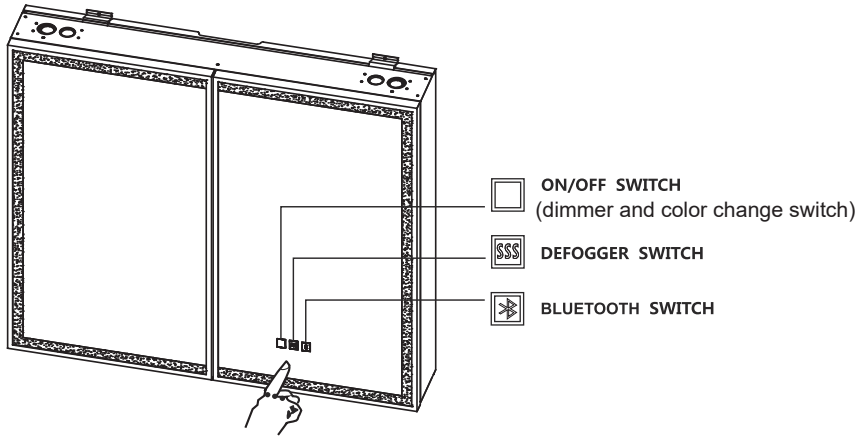

ON/OFF SWITCH


- Short press ON/OFF switch (by less than 1 second), the LED lights will be turned on. When the light is ON, double-tap within 3 seconds to switch color temperatures (3000K/4000K/6500K).

Short press(<1s)

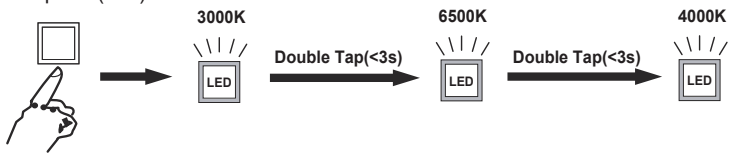


- Long press the ON/OFF SWITCH ☐ and hold on , the DIMMER function will be activated.The brightness can be adjusted from 5%-100%.

Long press (>1s) and hold on

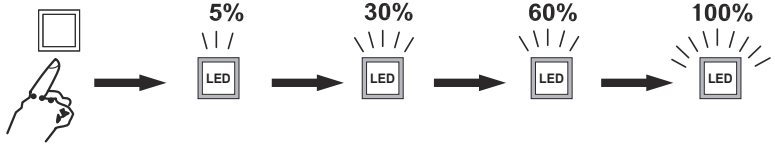


Important Notes:the switch is with Memory function, it will keep last setting of your luminance and on/off status.

- In Standy Mode - Hold the touch sensor to turn off the On/Off illuminated circle.

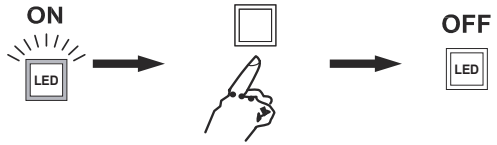


DEFOGGER SWITCH

- Short press ON/OFF switch (by less than 1 second), the Anti-fog pad will be turned on.

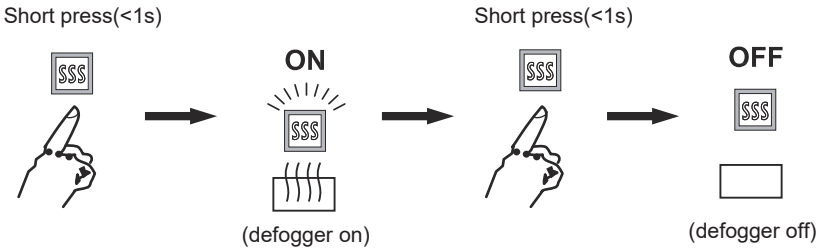

BLUETOOTH

- Short press ON/OFF switch (by less than 1 second), the BLUETOOTH will be turned on. Turn on Bluetooth on your phone or pad and search for “Mirror Multimedia” to connect. Once connected, you can play music from your device.

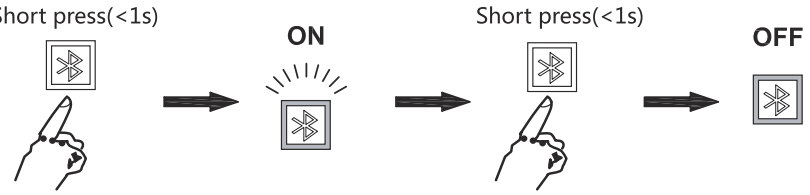

Important Notes: Bluetooth supports one device only.
Please disconnect or forget the current device before connecting another.