


Installation Manual

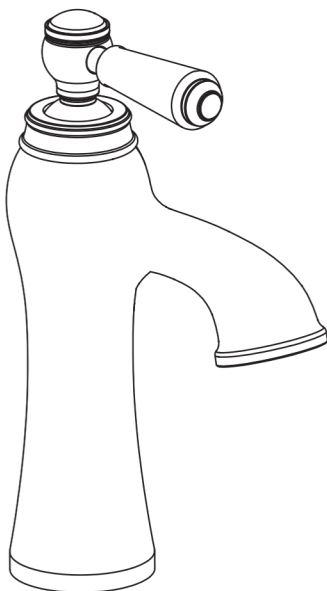

Apply for following models
11290/11291/11292/11293

Please keep this page for your online registration.

No. FIBTTBH29V1.0

Product image for reference




WARNING



CAUTION

If using solder for the installation of the tap; the tap seats, cartridges and washers will have to be removed before heating. Otherwise, the warranty will be voided on these parts.

TOOLS YOU MIGHT NEED



Screwdriver



Adjustable
Wrench

TECHNICAL DATA

Recommended water pressure: 7.25 - 43.5 psi


Max. Water pressure: 116 psi

Recommended hot water temp: 99.14 - 135.32 °F

Max. Hot water temp: 164.84 °F

Please know and follow all applicable local plumbing codes when setting the temperature on the water heater.

PARTS LIST

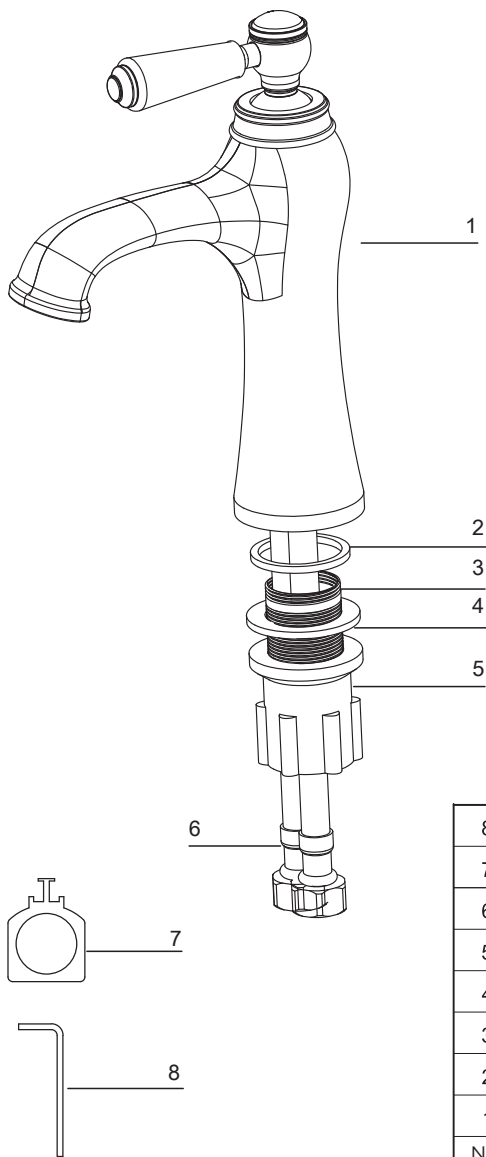


8	2.5mm Hex Key	1
7	Aerator Wrench	1
6	Flexible Tail	2
5	Locking Nut	1
4	Rubber Washer	1
3	Locking Sleeve	1
2	Rubber Washer	1
1	Tap Body	1
No.	Description	Quantity

BEFORE INSTALLATION

- ⌘ Observe all local plumbing codes.
- ⌘ Make sure water supply is turned off.
- ⌘ Read these instructions carefully to ensure proper installation.
- ⌘ Cover your drain to avoid losing parts.
- ⌘ Check to make sure you have the following parts indicated below.



Please check you have all of these items in the box.




Tap Body
X1




Flexible Tail
X2



2.5mm Hex Key
X1



Aerator Wrench
X1



Rubber Washer
X1



Locking Sleeve
X1




Locking Nut
X1

INSTALLATION PROCEDURE


1

Remove the rubber washer (4) and locking nut (5) from tap body.

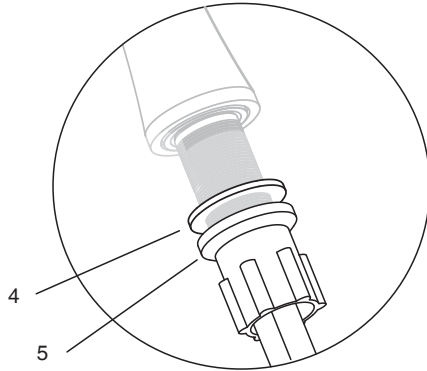

2


Pass the flexible tails (6) through the basin hole from above.

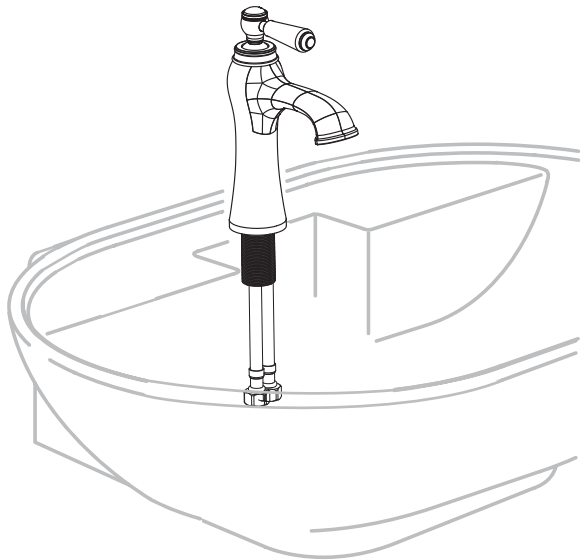

INSTALLATION PROCEDURE


3


Reinstall the rubber washer (4) and locking nut (5) in sequence.

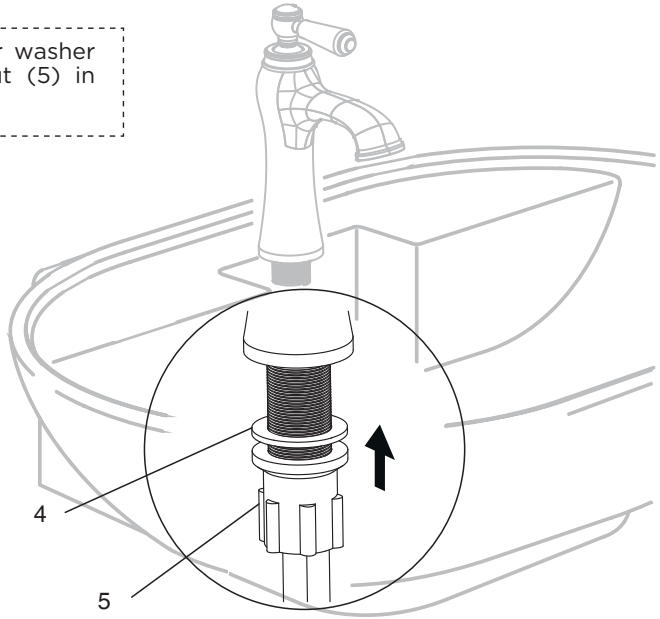

4

Tighten the locking nut (5), fixing the tap.

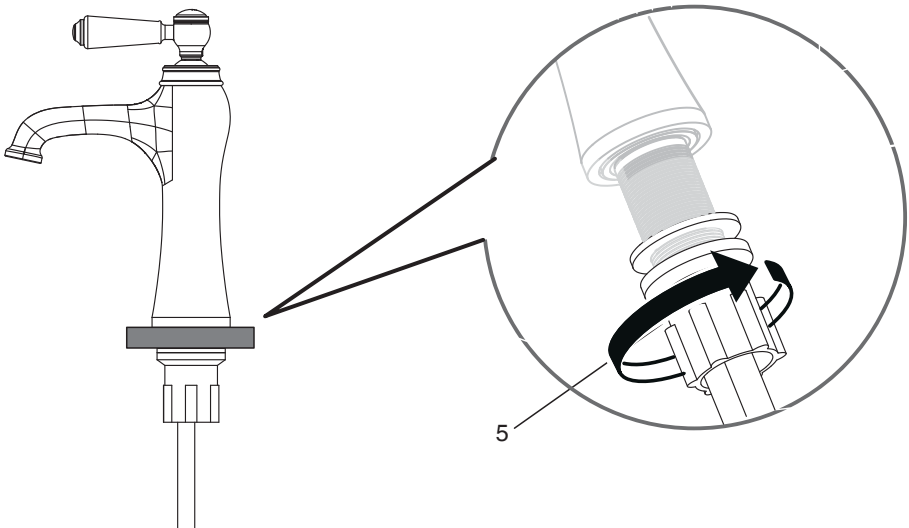

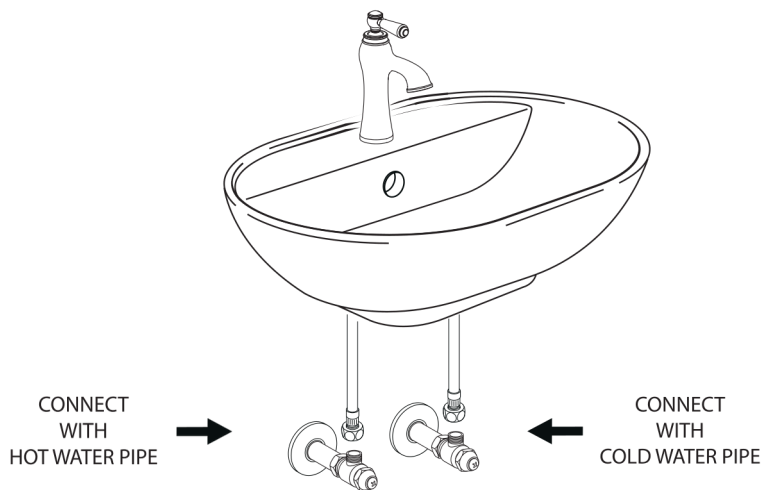

AFTER INSTALLATION

Ensure that all connections are tight. Ensure that the handle is in the off position. Turn on the drain and main water supply, and check for leaks. Repair as needed.

CARE & CLEANING

Your new tap is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with mild soap, rinse thoroughly with warm water and dry with a clean, soft cloth. Do not use abrasive cleaners, steel wool or harsh chemicals, as these will dull the finish. Failure to follow these instructions may void your warranty.

TROUBLE SHOOTING

If you've followed the instructions carefully and your tap still does not work properly, take these corrective steps.

Problem	Possible Cause	Solution
Insufficient water	- Aerator clogged	- Clean aerator, replace if necessary
Mixer stiff	- Cartridge defective	- Replace cartridge
Mixer dripping	- Cartridge defective	- Replace cartridge
Water leaks below handle	- Cartridge defective	- Replace cartridge
	- O-ring/rings defective	- Replace O-ring/rings
Water leaks at the connection	- Loose connection	- Tighten connection